

# Alert<sup>®</sup>

*Celebrating 60 Years*



WHERE INNOVATION COMES TO LIGHT<sup>®</sup>

[www.alertstamping.com](http://www.alertstamping.com)



WHERE INNOVATION COMES TO LIGHT®

Alert was incorporated in 1962. The original product line consisted of OEM stampings and retractable reels for vacuum cleaner manufacturers located in Northern Ohio. Our first retractable work light reel was manufactured in 1966.

In 2014, Alert was proud to announce its new brand image. Like the innovative products we manufacture, we are constantly doing more to stay current with our consumer image, customer care, and business practices.

Our facility in Bedford Heights, Ohio serves as our national headquarters. This location houses our main offices, sales & marketing department, product development team, manufacturing, warehousing and distribution facility. Our philosophy of keeping low overhead and passing along the savings to our customers has been in place since our first day in business.

We are committed to long-term partnerships built on mutual respect, compatibility, and a willingness to invest time and effort to ensure mutual success. A partnership built on trust and ethics is the cornerstone of our business philosophy.

The Alert ownership/management team has over 100 years' experience designing and manufacturing work lights, cord reels, and electrical products. We are recognized as a leader in technology and are committed to bringing the finest, most advanced, and most innovative products to our valued customers.





## Contents

|                                            |     |
|--------------------------------------------|-----|
| LED Work Lights, Cordless Battery Operated | 2   |
| LED Work Lights, Cordless Rechargeable     | 3   |
| LED Work Lights, Corded                    | 5   |
| LED Flood Lights                           | 7   |
| LED Flood Lights & Stands                  | 8   |
| LED Walk Lights                            | 8   |
| Corded LED Area and Shop Lights            | 9   |
| LED Retractable Work Light Reels           | 10  |
| LED Bench Lights                           | 11  |
| Fluorescent Work Lights                    | 12  |
| Retractable Work Light Reels               | 12  |
| Retractable Reels, Various                 | 13  |
| Incandescent Work Lights                   | 14  |
| Retractable Incandescent Work Reels        | 15  |
| Fluorescent Work Lights                    | 16  |
| Retractable Fluorescent Work Light Reels   | 18  |
| Hand Held Halogen Work Lights              | 19  |
| Portable Multi-Plug Cord Tenders           | 19  |
| Retractable Extension Cord Reels           | 20  |
| Weather Proof NEMA 3R Reels                | 22  |
| Retractable Data Reels                     | 23  |
| Extension Cords                            | 23  |
| Extension Cord Storage Devices             | 24  |
| Temporary String Lights                    | 24  |
| Outdoor Extension Cords                    | 25  |
| Commercial/Construction Site Products      | 25  |
| Incandescent Clamp Lamps                   | 26  |
| Replacement Parts                          | 28  |
| Glossary of Wire & Cable                   | IBC |

# LED Work Lights, Cordless Battery Operated



**KTB15G**



**KTB15P**



**KTB15B**



**KTB15Y**



**KTR15CFY  
KTR15CFB**



**KTB500S**



**KMB14S**



**KTB14S**



**KTB8S**



**KTB6**



**KTB6C**

| Catalog No.<br>Description/UPC | Pack | Weight | Battery<br>Type |
|--------------------------------|------|--------|-----------------|
|--------------------------------|------|--------|-----------------|

## **KTB6/KTB6C**

6 LED 60 LUMEN POCKET LIGHT WITH POCKET CLIP AND MAGNETIC BASE. 10 HOUR RUN TIME ON 3 "AAA" BATTERIES (INCLUDED).

**IMPORT ORDER ONLY**

UPC 0-40082-01271-3

6

1.5 lbs

3 "AAA"

UPC 0-40082-01283-6 (Camouflage)

6

1.5 lbs

3 "AAA"

## **KTB8S**

8 SMD LED 130 LUMEN POCKET LIGHT WITH POCKET CLIP AND MAGNETIC BASE. 8 HOUR RUN TIME ON 3 "AAA" BATTERIES (INCLUDED).

**IMPORT ORDER ONLY**

UPC 0-40082-01285-0

6

1.5 lbs

3 "AAA"

## **KTB15G/KTB15P/KTB15B/KTB15Y**

COB LED 160 LUMEN POCKET LIGHT WITH POCKET CLIP AND MAGNETIC BASE. 7 HOUR RUN TIME ON 3 "AAA" BATTERIES (INCLUDED).

UPC 0-40082-43037-1

**KTB15G** (Green)

8

1.9 lbs

3 "AAA"

UPC 0-40082-43038-8

**KTB15P** (Pink)

8

1.9 lbs

3 "AAA"

UPC 0-40082-43039-5

**KTB15B** (Black)

8

1.9 lbs

3 "AAA"

UPC 0-40082-43040-1

**KTB15Y** (Yellow)

8

1.9 lbs

3 "AAA"

## **KTR15CFY/ KTR15CFB**

RECHARGEABLE COB LED 2 IN 1 POCKET LIGHT. 150 LUMEN SIDE LIGHT AND 50 LUMEN TOP LIGHT. MICRO USB CHARGING PORT, POCKET CLIP AND MAGNET BASE. 3 HOUR RUN TIME SIDE AND 4 LUMEN TOP. 800mAh Li-ion Battery.

UPC 0-40082-43063-0

**KTB15CFY** (Yellow)

6

1.5 lbs

800 mAh Li-ion

UPC 0-40082-43066-1

**KTB15CFB** (Black)

6

1.5 lbs

800 mAh Li-ion

## **KTB500S**

4 SMD LED 240 LUMEN TASK LIGHT. TOP HANG HOOK, SLIM SHAPE. 12 HOUR RUN TIME ON 3 "AA" BATTERIES (NOT INCLUDED).

UPC 0-40082-01336-9

6

1.5 lbs

3 "AA"

## **OSL2600**

26 SMD LED 250 LUMEN RECHARGEABLE LIGHT BAR. UP TO 10 HOURS OF OPERATION ON A FULL CHARGE. MOTION ACTIVATED OR MANUAL ON/OFF. MAGNETS ALLOW MOUNTING TO MOST METAL SURFACES. STEEL PLATE INCLUDED CAN BE MOUNTED TO ANY SURFACE.

UPC 0-40082-01295-9

4

3.9 lbs

Rechargeable  
Lithium Ion

## **KMB14S**

14 SMD LED 150 LUMEN CORDLESS TASK LIGHT, PUSH SWITCH, DUAL BRIGHTNESS LEVELS, FOLDING SWIVEL HOOK, STAND UP BASE, PROTECTIVE TOP AND BOTTOM BUMPERS, FINGER GRIPS. USES 3 "AA" BATTERIES (NOT INCLUDED).

UPC 0-40082-01292-8

6

3.8 lbs

3 "AA"

## **KTB14S**

14 SMD LED 150 LUMEN TILT-AND-TWIST CORDLESS TASK LIGHT. HEAD TILTS 90° AND ROTATES 320° TO DIRECT LIGHT, MAGNETIC BASE STAND, FOLDING SWIVEL HOOK, DUAL BRIGHTNESS LEVELS, TOP AND BOTTOM PROTECTIVE BUMPERS. USES 3 "AA" BATTERIES (NOT INCLUDED).

UPC 0-40082-01293-5

5

4.5 lbs

3 "AA"

**OSL2600**







| Catalog No.<br>Description/UPC | Pack | Weight | Battery Type |
|--------------------------------|------|--------|--------------|
|--------------------------------|------|--------|--------------|

## LHR5200

RECHARGEABLE COB LED AUTO HOOD LIGHT. TWO DETACHABLE WORK/FLOOD LIGHTS WITH DUAL BRIGHTNESS LEVELS: 1200 LUMENS ON HIGH AND 600 LUMENS ON LOW, CHARGE STATUS INDICATOR LIGHTS, MAGNETIC BASE TILTS AND ROTATES, RAIN TIGHT. CAN ALSO BE USED AS A USB POWER BANK TO CHARGE YOUR DEVICE. BRACKET EXTENDS UP TO 78" AND CAN STAND ON FLAT SURFACES. UP TO 7 HOUR RUN TIME. USB-C CORD AND CHARGER PLUG INCLUDED.

UPC 0-40082-31095-4  4 28.45 lbs Rechargeable Lithium Ion

## THR4000

RECHARGEABLE SMD LED AUTO HOOD LIGHT. DUAL BRIGHTNESS LEVELS: 1200 LUMENS ON HIGH AND 700 LUMENS ON LOW. BRACKET EXTENDS UP TO 78" AND CAN STAND ON FLAT SURFACES. UP TO 5 HOUR RUN TIME (ON LOW SETTING). USB CORD AND CHARGING CRADLE INCLUDED.

UPC 0-40082-83043-0  4 17.2 lbs Rechargeable Lithium Ion

## LR202

20 LED, 100 LUMEN RECHARGEABLE MULTI DIRECTIONAL TASK LIGHT. MULTI POSITION HEAD SWIVELS 90°, DUAL BRIGHTNESS LEVELS, FOLDING SWIVEL HOOK, STAND UP CUSHION BASE, FINGER GRIPS AND INTERNAL NIMH BATTERY.

UPC 0-40082-01211-9  4 5.7 lbs Rechargeable NiMH

## KWR12

12 SMD LED 360 LUMEN RECHARGEABLE RAINPROOF TASK LIGHT. IP65 RAINPROOF RATED, ROTATING HANG HOOK, RUBBERIZED HANDLE, 3.7V Li-ion BATTERY, SEALED PUSH SWITCH, CHARGE STATUS INDICATOR LIGHT AND MAGNETIC BASE.

UPC 0-40082-83042-3  4 3.6 lbs Rechargeable Lithium Ion

## KSR3000

30 SMD LED 300 LUMEN RECHARGEABLE TASK LIGHT WITH DUAL BRIGHTNESS LEVELS, TWO FOLDING SWIVEL HOOKS, CHARGER, ON/OFF PUSH SWITCH IN HANDLE, PROTECTIVE TOP AND BOTTOM BUMPERS, FINGER GRIPS, ROTATING MAGNET, CHARGE STATUS INDICATOR LED.

UPC 0-40082-43021-0  4 7.5 lbs Rechargeable Lithium Ion

## TSR309

30 SMD LED 180 LUMEN RECHARGEABLE TASK LIGHT WITH 9 SMD LED 40 LUMEN FLASHLIGHT. TOP SWIVEL HOOK, MAGNETIC SIDE, CHARGE STATUS INDICATOR LED, 12V DC AUTO ACCESSORY PLUG AND 120V AC CHARGER.

UPC 0-40082-43011-1   6 8 lbs Rechargeable NiMH

# LED Work Lights, Cordless Rechargeable



**KCR5**



**KCR10**



**KWR6CT**



**LER48C**

| Catalog No.<br>Description/UPC | Pack | Weight | Battery Type |
|--------------------------------|------|--------|--------------|
|--------------------------------|------|--------|--------------|

## KCR5

5 WATT COB LED 400 LUMEN RECHARGEABLE TASK LIGHT. 3000mAh LITHIUM ION BATTERY, FOLDING SWIVEL HOOK, OVERMOLDED COMFORT RUBBER HANDLE AND MICRO USB CHARGER.

UPC 0-40082-01288-1



4

4.4 lbs

Rechargeable Lithium Ion

## KCR10

800 LUMEN RECHARGEABLE COB WORKLIGHT. 3.7V, 4400mAh LI-ION BATTERY, USB C CHARGE PORT, PUSH BUTTON ON/OFF SWITCH, INTEGRATED MAGNET, FOLDING HOOK ROTATES 360°, WIDE STAND BASE W/ MAGNET. MAX 6 HOUR RUN TIME ON LOW SETTING.

UPC 0-40082-05934-3

4

8.2 lbs

Rechargeable Lithium Ion

## KWR6CT

COB LED 600 LUMEN RECHARGEABLE TILT LIGHT WITH 120 LUMEN TOP LIGHT. HEAD TILTS 120° FORWARD AND BACKWARD. MAGNET BASE, ALUMINUM HEAD, RUBBERIZED HANDLE, DUAL BRIGHTNESS LEVELS (600/250), 2600 mAh LI-ION BATTERY, IP54 RAINPROOF, BATTERY LEVEL/CHARGE STATUS INDICATOR LIGHTS. MICRO USB CHARGER INCLUDED.

UPC 0-40082-00430-5



4

5.3 lbs

Rechargeable Lithium Ion

## LER48C

48 LED RECHARGEABLE 240 LUMEN TASK LIGHT WITH CHARGING CRADLE, DUAL BRIGHTNESS LEVELS, CHARGE STATUS INDICATOR LIGHTS, 2 SWIVEL HOOKS, LANYARD, CARRY POUCH.

UPC 0-40082-01086-3



4\*

10 lbs

Rechargeable NiMH

## SPR10Z

650 LUMEN RECHARGEABLE 10 WATT LED SPOT LIGHT. HIGH LOW BRIGHTNESS SETTINGS, PUSH BUTTON TO LOCK THE LIGHT ON, FOLDING STAND, LANYARD, RUGGED IMPACT RESISTANT HOUSING, RUBBER HEAD, IP67 WATERPROOF RATING, FORM FITTING PISTOL GRIP HANDLE. USB CHARGE CORD AND 12V DC CHARGER INCLUDED. 3.7V 4000mAh LI-ION BATTERY.

UPC 0-40082-05939-8

4\*

4.4 lbs

Rechargeable Lithium Ion

## CLR3S

175 LUMEN RECHARGEABLE LED LANTERN LIGHT. DUAL BRIGHTNESS WHITE CREE® WITH RED NIGHT LIGHT, 3000 mAh Li-ion BATTERY, AC/DC CHARGING PLUGS WITH STATUS INDICATOR LIGHT. SWIVEL HANDLE HAS FOLDING HOOK, RAINPROOF.

UPC 0-40082-01281-2



4

12 lbs

Rechargeable Lithium Ion

\* Clam shell package



**SPR10Z**



**CLR3S**

# LED Work Lights, Corded

**RTL30**



**RTL30SM**



**RTL10SB**



**KWC1225**



**KSM1812**



**KSM3015**



| Catalog No.<br>Description/UPC | Pack | Weight | Cord<br>Length | Wire<br>Gauge | Wire<br>Type |
|--------------------------------|------|--------|----------------|---------------|--------------|
|--------------------------------|------|--------|----------------|---------------|--------------|

## RTL30

30 LED 110 LUMEN TROUBLE LIGHT MODULE, HEAD ROTATES 320°, FOLDING TOP HANG SWIVEL HOOK, PROTECTIVE BUMPERS.

UPC 0-40082-01236-2



5\*

4.8 lbs

N/A

N/A

N/A

## RTL30SM

30 SMD LED 350 LUMEN TROUBLE LIGHT REPLACEMENT MODULE. HEAD ROTATES 320°, FOLDING TOP HANG SWIVEL HOOK, PROTECTIVE BUMPERS.

UPC 0-40082-01289-8



5\*

4.8 lbs

N/A

N/A

N/A

## RTL10SB

10 ONE-WATT LED 850 LUMEN TROUBLE LIGHT REPLACEMENT MODULE. HEAD ROTATES 320°, FOLDING TOP HANG SWIVEL HOOK, PROTECTIVE BUMPERS.

UPC 0-40082-01338-3



5\*

5.8 lbs

NA

NA

NA

## KWC1225

12 SMD LED 360 LUMEN CORDED WATERPROOF TASK LIGHT. IP54 RAINPROOF RATED, 25FT 18/2 SJTOW CORD, ROTATING HANG HOOK, RUBBERIZED HANDLE, SEALED PUSH SWITCH.

UPC 0-40082-01307-9



4\*

10.2 lbs

25 ft

18/2

SJTOW

## KSM1812

18 SMD LED 150 LUMEN TASK LIGHT WITH 12 FT CORD, FOLDING SWIVEL HOOK, ON/OFF PUSH SWITCH IN HANDLE, PROTECTIVE TOP AND BOTTOM BUMPERS, FINGER GRIPS.

UPC 0-40082-01309-3



6\*

6.7 lbs

12 ft

18/2

SJT

## KSM3015

30 SMD 300 LUMEN TASK LIGHT WITH 2 FOLDING SWIVEL HOOKS, ROTATING MAGNET, TOP AND BOTTOM BUMPERS AND FINGER GRIPS.

UPC 0-40082-01287-4



4\*

7 lbs

15 ft

18/2

SJT

## KSM3415

34 SMD 500 LUMEN TASK LIGHT WITH 2 FOLDING SWIVEL HOOKS, ROTATING MAGNET, TOP AND BOTTOM BUMPERS AND FINGER GRIPS.

UPC 0-40082-01286-7



4\*

9.9 lbs

15 ft

18/2

SJT



\* Clam shell package



# LED Work Lights, Corded



**KCL515**

| Catalog No.<br>Description/UPC | Pack | Weight | Cord<br>Length | Wire<br>Gauge | Wire<br>Type |
|--------------------------------|------|--------|----------------|---------------|--------------|
|--------------------------------|------|--------|----------------|---------------|--------------|

## KCL515

5 WATT COB LED 450 LUMEN TASK LIGHT. PUSH BUTTON ON/OFF SWITCH, BUILT IN NEODYMIUM MAGNET, FOLDING SWIVEL HOOK AND OVERMOLDED COMFORT RUBBER HANDLE.

UPC 0-40082-43015-9



4\*

4.8 lbs

15 ft

18/2

SJT

## KCL815

8 WATT COB LED 975 LUMEN TASK LIGHT. PUSH BUTTON ON/OFF SWITCH, BUILT IN NEODYMIUM MAGNET, FOLDING SWIVEL HOOK AND OVERMOLDED COMFORT RUBBER HANDLE.

UPC 0-40082-43056-2



4\*

6.6 lbs

15 ft

18/2

SJT



**KCL815**

## LES3215G

32 SMD LED 450 LUMEN PORTABLE TASK LIGHT WITH BUILT IN GROUNDED OUTLET, PUSH BUTTON ON/OFF SWITCH,, REMOVABLE ROTATING MAGNET CLIP, FOLDING SWIVEL HOOK AND POWER "ON" INDICATOR LIGHT.

UPC 0-40082-01264-5



4\*

11.4 lbs

15 ft

16/3

SJT

## LEC30-15

30 LED 12 VOLT DC AUTOMOTIVE TASK LIGHT, PUSH BUTTON ON/OFF SWITCH, SWIVEL HOOK, FINGER GRIPS, HAS AUTO ACCESSORY PLUG END W/ 15 FT. CORD, POUCH, HIGH VISIBILITY YELLOW W/ REFLECTOR BACK.

UPC 0-40082-01081-8



4\*

6.13 lbs

15 ft

18/2

SVT



**LES3215G**

## KTM3315G

1300 LUMEN COB LED TASK LIGHT. GROUNDED OUTLET AND PUSH BUTTON ON/OFF SWITCH, IN HANDLE, INTEGRATED MAGNET, SWIVEL HOOK, POWER "ON" INDICATOR LIGHT, OVER MOLDED RUBBER HANDLE, 15' 16/3 SJT CORD.

UPC 0-40082-43078-4



4\*

12.25 lbs

15 ft

16/3

SJTOW

## KTN5515G

2000 LUMEN COB CORDED WORKLIGHT. 15FT 16/3 SJTOW CORD, INTEGRATED MAGNET, GROUNDED OUTLET IN HANDLE, INDEPENDENT SWITCHES FOR HIGH LOW BRIGHTNESS LEVELS (2000 LUMEN OR 1000 LUMEN), FOLDING TOP AND BOTTOM HOOKS ROTATES 360°.

UPC 0-40082-05933-6



4

13.7 lbs

15 ft

16/3

SJTOW

\* Clam shell package



**LEC30-15**



**KTM3315G**



**KTN5515G**



# LED Flood Lights



**LJR20C**



**LZR10C**



**LF15S**



**LF63S**



**LF84S**



**LF120S**

| Catalog No.<br>Description/UPC | Pack | Weight | Cord<br>Length | Wire<br>Gauge | Wire<br>Type | Maximum<br>Rating |
|--------------------------------|------|--------|----------------|---------------|--------------|-------------------|
|--------------------------------|------|--------|----------------|---------------|--------------|-------------------|

## LJR20C

20W SMD LED RECHARGEABLE FLOOD LIGHT. PUSH BUTTON DIMMER FOR 3 BRIGHTNESS LEVELS: 2000, 1000 AND 500 LUMENS. 4400 mAh Li-ION BATTERY. RUN TIME 2.5 HOURS ON HIGH, 5 HOURS ON MID SETTING AND 10 HOURS ON LOW. LOW BATTERY AND CHARGE STATUS INDICATOR LIGHT. CAST ALUMINUM HOUSING, TEMPERED GLASS LENS. IP54 RAINPROOF.

UPC 0-40082-43081-4



4

17.64 lbs

RECHARGEABLE LITHIUM ION BATTERY

## LZR10C

RECHARGEABLE COB FLOOD LIGHT. DUAL OUTPUT BRIGHTNESS 1200 AND 600 LUMENS. PUSH BUTTON ON/OFF SWITCH, USB-C CHARGER, CHARGE STATUS INDICATOR LIGHTS, MAGNETIC BASE TILTS AND ROTATES, RAIN TIGHT. CAN ALSO BE USED AS A USB POWER BANK TO CHARGE YOUR DEVICE.

UPC 0-40082-31096-1



4

4.5 lbs

RECHARGEABLE LITHIUM ION BATTERY

## LF15S

15 SMD LED 1000 LUMEN PORTABLE FLOODLIGHT. 50,000 HOUR LIFE. IP54 RAINPROOF RATED. 5 FT 18/3 SJTW CORD NO SWITCH.

UPC 0-40082-05938-1



6

9.25 lbs

5 ft.

18/2

SJTW

## LF63S

63 SMD LED 3000 LUMEN PORTABLE FLOODLIGHT. 50,000 HOUR LIFE. IP54 RAINPROOF RATED. RUGGED CAST ALUMINUM BODY, POWDER COATED FINISH. 6 FT 18/3 SJTW CORD - PUSH BUTTON ON/OFF SWITCH.

UPC 0-40082-98186-6



4

12.7 lbs

6 ft.

18/3

SJTW

32W  
0.3A 120V

## LF84S

84 SMD LED 5000 LUMEN PORTABLE FLOODLIGHT. 50,000 HOUR LIFE. IP54 RAINPROOF RATED. RUGGED CAST ALUMINUM BODY, POWDER COATED FINISH. 6 FT 18/3 SJTW CORD - PUSH BUTTON ON/OFF SWITCH.

UPC 0-40082-98187-3



4

15.5 lbs

6 ft.

18/3

SJTW

52W  
0.45A 120V

## LF120S

120 SMD LED 7000 LUMEN PORTABLE FLOODLIGHT. 50,000 HOUR LIFE. IP54 RAINPROOF RATED. RUGGED CAST ALUMINUM BODY, POWDER COATED FINISH. 6 FT 18/3 SJTW CORD - PUSH BUTTON ON/OFF SWITCH.

UPC 0-40082-98188-0



4

18.7 lbs

6 ft.

18/3

SJTW

64W  
0.55A 120V



## LED Flood Lights & Stands



LF168ST



LF240ST



TS500



SWB100B/G/P/N



SWR100R

| Catalog No.<br>Description/UPC | Pack | Weight | Cord<br>Length | Wire<br>Gauge | Wire<br>Type | Maximum<br>Rating |
|--------------------------------|------|--------|----------------|---------------|--------------|-------------------|
|--------------------------------|------|--------|----------------|---------------|--------------|-------------------|

### LF168ST

TWIN 84 SMD LED FLOODLIGHTS WITH 10,000 LUMEN OUTPUT AND 56" TRIPOD. 50,000 HOUR LIFE. IP54 RAINPROOF RATED. RUGGED CAST ALUMINUM BODY, POWDER COATED FINISH. 6 FT 18/3 SJTW CORD - PUSH BUTTON ON/OFF SWITCH.

|                     |   |          |       |      |      |                    |
|---------------------|---|----------|-------|------|------|--------------------|
| UPC 0-40082-98189-7 | 2 | 25.8 lbs | 6 ft. | 18/3 | SJTW | 103W<br>0.86A 120V |
|---------------------|---|----------|-------|------|------|--------------------|

### LF240ST

TWIN 120 SMD LED FLOODLIGHTS WITH 14,000 LUMEN OUTPUT AND 56" TRIPOD. 50,000 HOUR LIFE. IP54 RAINPROOF RATED. RUGGED CAST ALUMINUM BODY, POWDER COATED FINISH. 6 FT 18/3 SJTW CORD - PUSH BUTTON ON/OFF SWITCH.

|                     |   |           |       |      |      |                   |
|---------------------|---|-----------|-------|------|------|-------------------|
| UPC 0-40082-98190-3 | 2 | 28.64 lbs | 6 ft. | 18/3 | SJTW | 130W<br>1.1A 120V |
|---------------------|---|-----------|-------|------|------|-------------------|

### LEP48S

48 SMD 750 LUMEN FLOOD LIGHT. IP54 RAINPROOF HOUSING AND SWITCH. ADJUSTABLE STAND OR WALL MOUNT.

|                     |   |        |        |      |      |                  |
|---------------------|---|--------|--------|------|------|------------------|
| UPC 0-40082-01305-5 | 4 | 12 lbs | 10 ft. | 18/2 | SJTW | 10W<br>0.5A 120V |
|---------------------|---|--------|--------|------|------|------------------|

### TS500

56" TRIPOD FOR ALERT FLOOD LIGHTS. YELLOW POWDER COATED STEEL CONSTRUCTION. FOLDS TO 24" CLOSED LENGTH. FITS ALL CURRENT ALERT FLOOD LIGHT MODELS.

|                     |   |          |  |  |  |  |
|---------------------|---|----------|--|--|--|--|
| UPC 0-40082-43113-2 | 4 | 20.1 lbs |  |  |  |  |
|---------------------|---|----------|--|--|--|--|



LEP48S

## LED Walk Lights

| Catalog No.<br>Description/UPC | Pack | Weight | Battery Type |
|--------------------------------|------|--------|--------------|
|--------------------------------|------|--------|--------------|

### SWB100B/G/P/N

PATHFINDER MULTI DIRECTIONAL LED WALK LIGHT. FORWARD FACING CREE™ LED LIGHTS YOUR PATH AHEAD. 3 SMD LED'S SHINE DOWN TO LIGHT AT YOUR FEET AND FLASHING REAR RED LED'S WARN TRAFFIC BEHIND YOU. RUBBERIZED HANDLE, RAINPROOF, 4 POSITION SWITCH. OPERATES ON 3 "AA" BATTERIES (NOT INCLUDED).

|                            |   |        |        |
|----------------------------|---|--------|--------|
| UPC 0-40082-01310-9 (blue) | 5 | 2.5 lb | 3 "AA" |
|----------------------------|---|--------|--------|

|                             |   |        |        |
|-----------------------------|---|--------|--------|
| UPC 0-40082-01312-3 (green) | 5 | 2.5 lb | 3 "AA" |
|-----------------------------|---|--------|--------|

|                            |   |        |        |
|----------------------------|---|--------|--------|
| UPC 0-40082-01320-8 (pink) | 5 | 2.5 lb | 3 "AA" |
|----------------------------|---|--------|--------|

|                              |   |        |        |
|------------------------------|---|--------|--------|
| UPC 0-40082-01313-0 (orange) | 5 | 2.5 lb | 3 "AA" |
|------------------------------|---|--------|--------|

### SWR100R

PATHFINDER RECHARGEABLE MULTI DIRECTIONAL LED WALK LIGHT. FORWARD FACING CREE™ LED LIGHTS YOUR PATH AHEAD. 3 SMD LED'S SHINE DOWN TO LIGHT AT YOUR FEET AND FLASHING REAR RED LED'S WARN TRAFFIC BEHIND YOU. RUBBERIZED HANDLE, RAINPROOF, 4 POSITION SWITCH, MICRO USB CHARGER.

|                     |   |        |                          |
|---------------------|---|--------|--------------------------|
| UPC 0-40082-01319-2 | 5 | 3.6 lb | RECHARGEABLE LITHIUM ION |
|---------------------|---|--------|--------------------------|

# Corded LED Area and Shop Lights



**LSL3606**

## LSL3606

34 INCH LED SHOP LIGHT. 3000 LUMEN, 4000K, CRI83. PULL CHAIN ON/OFF SWITCH. 6 FOOT 18/3 SPT2 CORD. INCLUDES 16 INCH HANG CHAINS AND PULL CHAIN EXTENSION.

**UPC 0-40082-43080-7**

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating  | Master<br>Pack | Master<br>Weight |
|--------------------------------|---------------------------|--------------------|----------------|------------------|
|                                | SPT2 18/3 6 ft            | 0.40A<br>120V 60Hz | 4              | 9 lbs            |

## PLA360

36-1/2 INCH 5988 LUMEN HEAVY DUTY INDOOR/OUTDOOR LED AREA LIGHT IP65 RAINPROOF. 15 FT SJOOW CORD WITH WATER PROOF NEMA 5-15 PLUG. 2 FT FEEDER CORD WITH WATER PROOF NEMA 5-15R CONNECTOR. LIGHTS CAN BE CHAINED TOGETHER (MAX 10 PER CHAIN). ADJUSTABLE NYLON HANG STRAPS, HEAVY DUTY POLYCARBONATE TUBE AND POLYURETHANE END COVERS. WATERPROOF ON/OFF SWITCH.

**UPC 0-40082-98183-5**



|                           |                           |   |          |
|---------------------------|---------------------------|---|----------|
| SJOOW 16/3<br>2 and 15 ft | 50 WATT<br>0.5A 90-240VAC | 1 | 9.15 lbs |
|---------------------------|---------------------------|---|----------|

## PLA384

45-1/2 INCH 7180 LUMEN HEAVY DUTY INDOOR/OUTDOOR LED AREA LIGHT IP65 RAINPROOF. 15 FT SJOOW CORD WITH WATER PROOF NEMA 5-15 PLUG. 2 FT FEEDER CORD WITH WATER PROOF NEMA 5-15R CONNECTOR. LIGHTS CAN BE CHAINED TOGETHER (MAX 10 PER CHAIN). ADJUSTABLE NYLON HANG STRAPS, HEAVY DUTY POLYCARBONATE TUBE AND POLYURETHANE END COVERS. WATERPROOF ON/OFF SWITCH.

**UPC 0-40082-98184-2**



|                           |                           |   |          |
|---------------------------|---------------------------|---|----------|
| SJOOW 16/3<br>2 and 15 ft | 60 WATT<br>0.6A 90-240VAC | 1 | 10.7 lbs |
|---------------------------|---------------------------|---|----------|



**PLA360**



**PLA384**





# LED Retractable Work Light Reels



| Catalog No.<br>Description/UPC                                                                                                                                                                                                | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating      | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------------------------|----------------|----------------------|------------------|
| <b>920LSM</b><br>18 SMD LED 150 LUMEN RETRACTABLE CORD REEL TASK LIGHT, 20FT 18/2 SVT CORD WITH HIGH-IMPACT PLASTIC REEL HOUSING AND ON/OFF SWITCH BUILT INTO HANDLE, SWIVEL HANGING HOOK, TOP AND BOTTOM PROTECTIVE BUMPERS. |                               |                        |                |                      |                  |
| UPC 0-40082-01284-3                                                                                                                                                                                                           | SVT 18/2<br>20 ft             | 3.5 WATT<br>0.05A 120V | 4              | .94 CU ft            | 17.2 lbs         |

|                                                                                                                                                                                            |                   |                     |   |            |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------|---|------------|--------|
| <b>3230SMS</b><br>30 SMD LED 300 LUMEN RETRACTABLE CORD REEL TASK LIGHT. POWDER COATED STEEL REEL HOUSING, ON/OFF SWITCH IN HANDLE. DUAL FOLDING SWIVEL HOOKS, REMOVEABLE ROTATING MAGNET. |                   |                     |   |            |        |
| UPC 0-40082-01290-4                                                                                                                                                                        | SJT 18/2<br>30 ft | 5 WATT<br>.07A 120V | 4 | 1.88 CU ft | 31 lbs |

|                                                                                                                                                                                                         |                   |                     |   |            |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------|---|------------|--------|
| <b>5050CL8</b><br>8 WATT COB LED 975 LUMEN CORD REEL. RUGGED POWDER COATED STEEL REEL, POWER "ON" INDICATOR LIGHT, BUILT IN NEODYMIUM MAGNET, FOLDING SWIVEL HOOK AND OVERMOLDED COMFORT RUBBER HANDLE. |                   |                     |   |            |        |
| UPC 0-40082-43057-9                                                                                                                                                                                     | SJT 18/2<br>50 ft | 8 WATT<br>.13A 120V | 4 | 2.17 CU ft | 38 lbs |

|                                                                                                                                                                      |                   |                       |   |            |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------|---|------------|----------|
| <b>5050SM</b><br>34 SMD LED 500 LUMEN CORD REEL WORK LIGHT. TOP AND BOTTOM PROTECTIVE BUMPERS AND FOLDING SWIVEL HOOKS, REMOVEABLE ROTATING MAGNET AND FINGER GRIPS. |                   |                       |   |            |          |
| UPC 0-40082-01321-5                                                                                                                                                  | SJT 18/2<br>50 ft | 7.2 WATT<br>0.1A 120V | 4 | 2.75 CU ft | 42.4 lbs |



# LED Retractable Work Light Reels



5030AS



5030AM



8150MM



FTL130



FTL230

RBK11000

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## 5030AS

32 SMD LED 450 LUMEN RETRACTABLE CORD REEL RUGGED POWDER COATED STEEL REEL, WITH BUILT IN GROUNDED OUTLET, ON/OFF SWITCH, REMOVABLE ROTATING MAGNET CLIP, FOLDING SWIVEL HOOK AND POWER "ON" INDICATOR LIGHT.

UPC 0-40082-01308-6



SJT 16/3  
30 ft 1440 WATT  
12A 120V

4

2 CU ft

42 lbs

## 5030AM

1300 LUMEN COB LED CORD REEL TASK LIGHT. GROUNDED OUTLET AND ON/OFF SWITCH IN HANDLE, INTEGRATED MAGNET, SWIVEL HOOK, POWER "ON" INDICATOR LIGHT, OVER MOLDED RUBBER HANDLE.

UPC 0-40082-43079-1



SJTOW 16/3 1440 WATT  
30 ft 12A 120V

4

2.29 CU ft

39.8 lbs

## 8150MM

1300 LUMEN COB LED CORD REEL TASK LIGHT. GROUNDED OUTLET AND ON/OFF SWITCH IN HANDLE, INTEGRATED MAGNET, SWIVEL HOOK, POWER "ON" INDICATOR LIGHT, OVER MOLDED RUBBER HANDLE. INDUSTRIAL GRADE THERMOPLASTIC HOUSING, REMOVEABLE STEEL MOUNTING BRACKET, CONVENIENT CARRY HANDLE.

UPC 0-40082-43116-3



SJTOW 14/3 1625 WATT  
50 ft 13A 125V

2

2.1 CU ft

30.4 lbs

# LED Bench Lights

| Catalog No.<br>Description/UPC | Pack | Weight | Cord<br>Length | Wire<br>Gauge | Wire<br>Type |
|--------------------------------|------|--------|----------------|---------------|--------------|
|--------------------------------|------|--------|----------------|---------------|--------------|

## FTL130

220 LUMEN CREE® LED. 18" FLEXIBLE ARMS-DIRECTS LIGHT AND MAGNIFICATION. 4" DIAMETER FRAMELESS MAGNIFIER-2X GENERAL /10X SPOT MAGNIFICATION. HEAVY NON-TIPPING BASE WITH BUILT-IN STORAGE TRAY AND MAGNET. MOUNTS TO 3/8" FLY TYING VICE POST. BENCH CLAMP ACCOMMODATES UP TO 2 3/4" THICK SURFACES.

UPC 0-40082-01345-1



4

25 lbs

8 ft

22/2

SPT1

## FTL230

DUAL 220 LUMEN CREE® LED'S. 18" FLEXIBLE ARMS DIRECT LIGHT, ELIMINATES SHADOWS. MULTI-POSITION SWITCH CONTROLS LIGHT INDEPENDENTLY. HEAVE NON-TIPPING BASE WITH BUILT-IN STORAGE TRAY AND MAGNET. ALSO MOUNTS TO 3/8" POST. BENCH CLAMP ACCOMODATES UP TO 2-3/4" THICKNESS.

UPC 0-40082-01346-8



4

25 lbs

8 ft

22/2

SPT2

## RBK11000

11000 mAh LITHIUM POLYMER RECHARGEABLE POWER BANK. ON/OFF SWITCH AND CHARGE STATUS INDICATOR LED'S. WILL POWER THE FTL130 AND FTL230 WITH PROVIDED USB TO SINGLE PIN CORD. CAN ALSO BE USED TO CHARGE ANY DEVICE THAT USES USB TO MICRO USB WITH INCLUDED CORD.

UPC 0-40082-81940-4



20

14 lbs

# Flourescent Work Lights

**PLR-13**



| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## PLR-13

RECHARGEABLE 13 WATT FLUORESCENT TASK LIGHT WITH NiMH BATTERY PACK. REMOVEABLE BATTERY PACK WITH LOW VOLTAGE INDICATOR. AC/DC CHARGER.

UPC 0-40082-00833-4



N/A

7.2 V

4\*

1.2 CU ft

14 lbs

\* Clam shell package

# Retractable Work Light Reels

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## 920DT

INCANDESCENT LIGHT WITH RETRACTABLE HIGH-IMPACT PLASTIC REEL HOUSING, GROUNDED OUTLET, RESETTABLE CIRCUIT BREAKER, GROUNDED METAL GUARD, ON/OFF SWITCH AND HOOK.

UPC 0-40082-00536-4



SVT 18/3  
20 ft

875 WATT  
7A 120V

4

.971 CU ft

15.2 lbs

## 920LSM

18 SMD 150 LUMEN CORD REEL WORK LIGHT. HIGH-IMPACT PLASTIC REEL HOUSING, FOLDING SWIVEL HOOK, ON/OFF PUSH SWITCH IN HANDLE, PROTECTIVE TOP AND BOTTOM BUMPERS, FINGER GRIPS.

UPC 0-40082-01284-3



SJT 18/2  
20 ft

875 WATT  
7A 120V

4

.971 CU ft

17.2 lbs

## 3230EF

RETRACTABLE POWDER COATED STEEL REEL HOUSING WITH 13W FLUORESCENT PL TYPE LAMP. ON/OFF SWITCH IN HANDLE, FOLDING SWIVEL HOOK, NO TOOL BULB REPLACEMENT.

UPC 0-40082-00532-6



SJT 18/2  
30 ft

13 WATT  
.350A 120V

4

1.8 CU ft

31.6 lbs

## 3225UFC

RETRACTABLE POWDER COATED STEEL REEL HOUSING WITH 13W FLUORESCENT PL TYPE LAMP. ON/OFF SWITCH, GROUNDED OUTLET IN HANDLE, CIRCUIT BREAKER, FOLDING SWIVEL HOOK AND ROTATING MAGNET MOUNT.

UPC 0-40082-00541-8



SJT 16/3  
25 ft

1250 WATT  
10A 120V

4

1.9 CU ft

32.6 lbs

**920DT**

**920LSM**

**3225UFC**

**3230EF**





**3225ATC**

## 3225ATC

RETRACTABLE POWDER COATED STEEL HOUSING. THREE GROUNDED OUTLETS WITH RESETTABLE CIRCUIT BREAKER, POWER "ON" INDICATOR LIGHT.

**UPC 0-40082-00539-5**  SJT 16/3 25 ft 1200 WATT 10A 120V 4 1.4 CU ft 28.2 lbs

## 3525AC

RETRACTABLE PORTABLE POWER CORD REEL, POWDER-COATED STEEL HOUSING, 4 CIRCUIT BREAKER PROTECTED GROUNDED OUTLETS FLEXIBLE COLD WEATHER CORD, POWER "ON" INDICATOR LIGHT.

**UPC 0-40082-00534-0**  SJTW 16/3 25 ft 1200 WATT 10A 120V 4 1.2 CU ft 29 lbs

## 3230SMS

30 SMD LED 300 LUMEN RETRACTABLE CORD REEL TASK LIGHT. POWDER COATED STEEL REEL HOUSING, ON/OFF SWITCH IN HANDLE. DUAL FOLDING SWIVEL HOOKS, REMOVEABLE ROTATING MAGNET.

**UPC 0-40082-01290-4**  SJT 18/2 30 ft 2.4 WATT .020A 120V 4 1.88 CU ft 31 lbs



**3525AC**



**3230SMS**



## Incandescent Work Lights



| Catalog No.<br>Description/UPC                                                                                                                                                   | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
| <b>TL-6P</b><br>ON/OFF SWITCH BUILT INTO HANDLE / PLASTIC SWING – OPEN BULB GUARD WITH SWIVEL HOOK.                                                                              |                           |                   |                |                      |                  |
| <b>UPC 0-40082-01050-4</b>  SJT 18/2 6 ft 75 WATT 125V 9 1.7 CU ft 8.3lbs                       |                           |                   |                |                      |                  |
| <b>TL-25P</b><br>ON/OFF SWITCH BUILT INTO HANDLE / PLASTIC SWING – OPEN BULB GUARD WITH SWIVEL HOOK.                                                                             |                           |                   |                |                      |                  |
| <b>UPC 0-40082-00413-8</b>  SJT 18/2 25 ft 75 WATT 125V 6 <sup>†</sup> 1.3 CU ft 11.7 lbs       |                           |                   |                |                      |                  |
| <b>TL-25PN</b><br>PLASTIC SWING – OPEN BULB GUARD WITH SWIVEL HOOK. NO SWITCH.                                                                                                   |                           |                   |                |                      |                  |
| <b>UPC 0-40082-00471-8</b>  SJT 18/2 25 ft 75 WATT 125V 6 1.2 CU ft 10.7 lbs                    |                           |                   |                |                      |                  |
| <b>TL-25GM</b><br>GROUNDED SIDE OUTLET AND ON/OFF SWITCH BUILT INTO HANDLE. GROUNDED METAL SWING-OPEN BULB GUARD WITH HANGING HOOK.                                              |                           |                   |                |                      |                  |
| <b>UPC 0-40082-00419-0</b>  SJT 16/3 25 ft 1500 WATT 12A 125V 6 <sup>†</sup> 1.3 CU ft 16.8 lbs |                           |                   |                |                      |                  |
| <b>TL-50GM</b><br>GROUNDED SIDE OUTLET AND ON/OFF SWITCH BUILT INTO HANDLE. GROUNDED METAL SWING-OPEN BULB GUARD WITH HANGING HOOK.                                              |                           |                   |                |                      |                  |
| <b>UPC 0-40082-00453-4</b>  SJT 16/3 50 ft 1500 WATT 12A 125V 6 <sup>†</sup> 1.6 CU ft 28 lbs   |                           |                   |                |                      |                  |

<sup>†</sup> Display tray pack



## Incandescent Work Lights



| Catalog No.<br>Description/UPC                                                                                                                                                                                                                                   | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
| <b>TL-25GM-CB</b><br>GROUNDED SIDE OUTLET, RESETTABLE CIRCUIT BREAKER AND ON/OFF SWITCH BUILT INTO HANDLE. GROUNDED METAL SWING OPEN BULB GUARD WITH HANGING HOOK.                                                                                               |                           |                   |                |                      |                  |
| <b>UPC 0-40082-00414-5</b>  SJT 16/3 25 ft 1500 WATT 12A 125V 6 <sup>†</sup> 1.3 CU ft 16.9 lbs                                                                               |                           |                   |                |                      |                  |
| <b>TLP-25GM-CB</b><br>GROUNDED SIDE OUTLET, RESETTABLE CIRCUIT BREAKER AND ON/OFF SWITCH BUILT INTO HANDLE. GROUNDED, COATED METAL BULB GUARD WITH SPECIAL ROTARY HANGING HOOK. OIL RESISTANT OUTDOOR ALL-WEATHER CORD REMAINS FLEXIBLE IN SUBZERO TEMPERATURES. |                           |                   |                |                      |                  |
| <b>UPC 0-40082-00806-8</b>  SJTOW 16/3 25 ft 1500 WATT 12A 125V 6 <sup>†</sup> 1.3 CU ft 18 lbs                                                                               |                           |                   |                |                      |                  |
| <b>TLP-50GM-CB</b><br>GROUNDED SIDE OUTLET, RESETTABLE CIRCUIT BREAKER AND ON/OFF SWITCH BUILT INTO HANDLE. GROUNDED, COATED METAL BULB GUARD WITH SPECIAL ROTARY HANGING HOOK. OIL RESISTANT OUTDOOR ALL-WEATHER CORD REMAINS FLEXIBLE IN SUBZERO TEMPERATURES. |                           |                   |                |                      |                  |
| <b>UPC 0-40082-00807-5</b>  SJTOW 16/3 50 ft 1500 WATT 12A 125V 6 <sup>†</sup> 2.1 CU ft 29 lbs                                                                               |                           |                   |                |                      |                  |

**ABOVE UNITS HAVE A MAXIMUM OF 100 WATT LAMP RATING**

<sup>†</sup> Display tray pack



# Incandescent Work Lights



| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## HTL-25M-CB

GROUNDING METAL REFLECTOR WITH OSHA WRAP AROUND 360° HEAVY DUTY METAL BULB / REFLECTOR GUARD WITH SPECIAL ROTARY HANGING HOOK. ON/OFF SWITCH, GROUNDING SIDE OUTLET WITH RESETTABLE 12 AMP CIRCUIT BREAKER BUILT INTO HANDLE. OUTDOOR ALL-WEATHER CORD REMAINS FLEXIBLE IN SUBZERO TEMPERATURES.

|                            |                    |                       |                |           |        |
|----------------------------|--------------------|-----------------------|----------------|-----------|--------|
| <b>UPC 0-40082-00458-9</b> | SJTW 14/3<br>25 ft | 1500 WATT<br>12A 125V | 4 <sup>‡</sup> | 1.2 CU ft | 17 lbs |
|----------------------------|--------------------|-----------------------|----------------|-----------|--------|

## HTL-50M-CB

GROUNDING METAL REFLECTOR WITH OSHA WRAP AROUND 360° HEAVY DUTY METAL BULB / REFLECTOR GUARD WITH SPECIAL ROTARY HANGING HOOK. ON/OFF SWITCH, GROUNDING SIDE OUTLET WITH RESETTABLE 12 AMP CIRCUIT BREAKER BUILT INTO HANDLE. OUTDOOR ALL-WEATHER CORD REMAINS FLEXIBLE IN SUBZERO TEMPERATURES.

|                            |                    |                       |   |           |          |
|----------------------------|--------------------|-----------------------|---|-----------|----------|
| <b>UPC 0-40082-00468-8</b> | SJTW 14/3<br>50 ft | 1500 WATT<br>12A 125V | 4 | 1.9 CU ft | 25.1 lbs |
|----------------------------|--------------------|-----------------------|---|-----------|----------|

<sup>‡</sup> Display tray pack

**ABOVE UNITS HAVE A MAXIMUM OF 100 WATT LAMP RATING**



# Retractable Incandescent Work Light Reels

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|---------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

## 920DT

INCANDESCENT LIGHT WITH RETRACTABLE HIGH-IMPACT PLASTIC REEL HOUSING, GROUNDING OUTLET, RESETTABLE CIRCUIT BREAKER, GROUNDING METAL GUARD, ON/OFF SWITCH AND HOOK.

|                            |                   |                     |     |   |   |            |          |
|----------------------------|-------------------|---------------------|-----|---|---|------------|----------|
| <b>UPC 0-40082-00536-4</b> | SVT 18/3<br>20 ft | 875 WATT<br>7A 125V | YES | 1 | 4 | .971 CU ft | 15.2 lbs |
|----------------------------|-------------------|---------------------|-----|---|---|------------|----------|

## 5000A-30G

POWDER COATED STEEL REEL HOUSING. TROUBLE LIGHT WITH GROUNDING METAL BULB GUARD, ON/OFF SWITCH AND SIDE OUTLET BUILT INTO HANDLE.

|                            |                   |                       |    |   |   |           |          |
|----------------------------|-------------------|-----------------------|----|---|---|-----------|----------|
| <b>UPC 0-40082-00411-4</b> | SJT 16/3<br>30 ft | 1250 WATT<br>10A 125V | NO | 1 | 4 | 1.7 CU ft | 35.1 lbs |
|----------------------------|-------------------|-----------------------|----|---|---|-----------|----------|

## 5000-50G-CB

POWDER COATED STEEL REEL HOUSING. TROUBLE LIGHT WITH GROUNDING METAL BULB GUARD, ON/OFF SWITCH AND SIDE OUTLET BUILT INTO HANDLE WITH RESETTABLE CIRCUIT BREAKER.

|                            |                   |                     |     |   |   |           |          |
|----------------------------|-------------------|---------------------|-----|---|---|-----------|----------|
| <b>UPC 0-40082-00446-6</b> | SJT 18/3<br>50 ft | 875 WATT<br>7A 125V | YES | 1 | 4 | 1.7 CU ft | 37.8 lbs |
|----------------------------|-------------------|---------------------|-----|---|---|-----------|----------|

<sup>‡</sup> Display tray pack

**ABOVE UNITS HAVE A MAXIMUM OF 100 WATT LAMP RATING**

## Resettable Circuit Breakers

- Provides immediate overload protection
- Cuts off power due to accidental shorts

*If circuit breaker trips, remove overload and wait 2 minutes before resetting breaker by pushig on/off button.*







5000A-30G-CB

## Retractable Incandescent Work Light Reels


| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

### 5000A-30G-CB

POWDER COATED STEEL REEL. LIGHT WITH GROUNDED METAL BULB GUARD, ON/OFF SWITCH, RESETTABLE CIRCUIT BREAKER AND GROUNDED SIDE OUTLET ON HANDLE.

UPC 0-40082-00420-6  SJT 16/3 1250 WATT YES 1 4 1.7 CU ft 35.9 lbs  
30 ft 10A 125V

ABOVE UNIT HAS A MAXIMUM OF 100 WATT LAMP RATING



**Retractable Cord Reels-** Cord pulls out of reel to desired length and locks; retracts with slight tug on cord, providing built-in tangle-free cord storage. Reel units are either heavy-duty powder-coated metal or high impact resistant thermoplastic housings. All reel units include instructions and hardware for ceiling or wall mounting.



8050M-W

## Retractable Incandescent Work Light Reels

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

### 8050M-W

INDUSTRIAL GRADE THERMOPLASTIC REEL HOUSING. QUICK RELEASE MOUNTING BRACKET, CONVENIENT CARRYING HANDLE. WORK LIGHT WITH BUILT-IN CIRCUIT BREAKER. SIDE OUTLET AND OSHA WRAP AROUND 360° HEAVY-DUTY BULB REFLECTOR, GUARD. SPECIAL ROTATING HOOK.

UPC 0-40082-00801-3  SJTW 14/3 1625 WATT YES 1 2 2.1 CU ft 32.8 lbs  
50 ft 13A 125V

ALL CORD REEL UNITS INCLUDE HARDWARE AND INSTRUCTIONS FOR WALL OR CEILING MOUNTING  
MAXIMUM OF 100 WATT LAMP RATING



EPL-6  
EPL-15  
EPL-50

## Fluorescent Work Lights

*Energy-saving  
Fluorescent Lamps*

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

### EPL-6

13 WATT PL LAMP, BALLAST AND ON/OFF SWITCH BUILT IN HANDLE. POLYCARBONATE LENS W / 270° ARC OF LIGHT. SHATTER-RESISTANT HOUSING. 360° ADJUSTABLE HANGING HOOK. EASILY REPLACEABLE LAMP (NO TOOLS NEEDED).

UPC 0-40082-00439-8  SJT 18/2 13 WATT .350A 125V 6<sup>‡</sup> .6 CU ft 9.5 lbs  
6 ft

### EPL-15

13 WATT PL LAMP, BALLAST AND ON/OFF SWITCH BUILT IN HANDLE. POLYCARBONATE LENS W / 270° ARC OF LIGHT. SHATTER-RESISTANT HOUSING. 360° ADJUSTABLE HANGING HOOK. EASILY REPLACEABLE LAMP (NO TOOLS NEEDED).

UPC 0-40082-00438-1  SJT 18/2 13 WATT .350A 125V 6<sup>‡</sup> .6 CU ft 12.9 lbs  
15 ft

### EPL-50

13 WATT PL LAMP, BALLAST AND ON/OFF SWITCH BUILT IN HANDLE. POLYCARBONATE LENS W / 270° ARC OF LIGHT. SHATTER-RESISTANT HOUSING. 360° ADJUSTABLE HANGING HOOK. EASILY REPLACEABLE LAMP (NO TOOLS NEEDED).

UPC 0-40082-00489-3  SJT 18/2 13 WATT .350A 125V 4 .7 CU ft 16.5 lbs  
50 ft



# Fluorescent Work Lights

## Energy-Saving Fluorescent Lamps...

15F-25  
15F-50



### EPL-25NS

BALLAST BUILT IN HANDLE. POLYCARBONATE LENS W/ 270° ARC OF LIGHT. SHATTER-RESISTANT HOUSING. 360° ADJUSTABLE HANGING HOOK. EASILY REPLACEABLE 13 WATT LAMP (NO TOOLS NEEDED) NO SWITCH. MEETS N.E.C. 511 (F) FOR USE IN COMMERCIAL GARAGES.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| UPC 0-40082-00466-4            | cULus SJT 18/2 25 ft      | 13 WATT<br>.350A 125V | 6              | 1.1 CU ft            | 17.4 lbs         |

### 15F-25

ON/OFF SWITCH IN HANDLE. PLUG IN BALLAST. SHATTER-RESISTANT HOUSING. NON-GLARE LENS. HANGING HOOK SWIVELS 360°. 2 ADDITIONAL HOOKS FOR HORIZONTAL HANGING 15 WATT LAMP.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| UPC 0-40082-00408-4            | cUL SJT 18/2 25 ft        | 15 WATT<br>.305A 125V | 6              | 2.1 CU ft            | 20.6 lbs         |

### 15F-50

ON/OFF SWITCH IN HANDLE. PLUG IN BALLAST. SHATTER-RESISTANT HOUSING. NON-GLARE LENS. HANGING HOOK SWIVELS 360°. 2 ADDITIONAL HOOKS FOR HORIZONTAL HANGING 15 WATT LAMP.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| UPC 0-40082-00496-1            | cUL SJT 18/2 50 ft        | 15 WATT<br>.305A 125V | 6              | 2.1 CU ft            | 30 lbs           |

\* Display tray pack



QXL-6G  
QXL-25G



Grounded  
Outlet  
In Handle



UPL-25G  
UPL-50G



SF815

SF1415



# Fluorescent Work Lights

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

### QXL-6G

26 WATT FLUORESCENT PL TYPE LAMP, ON/OFF SWITCH AND GROUNDED OUTLET IN HANDLE, 2 MULTI-POSITION HOOKS, REMOVEABLE ROTATING MAGNET CLIP, NO TOOL BULB REPLACEMENT. POWER "ON" INDICATOR LIGHT.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| UPC 0-40082-01220-1            | cETLus SJT 16/3 6 ft      | 1440 WATT<br>12A 120V | 4              | .8 CU ft             | 10.5 lbs         |

### QXL-25G

26 WATT FLUORESCENT PL TYPE LAMP, ON/OFF SWITCH AND GROUNDED OUTLET IN HANDLE, 2 MULTI-POSITION HOOKS, REMOVEABLE ROTATING MAGNET CLIP, NO TOOL BULB REPLACEMENT. POWER "ON" INDICATOR LIGHT.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| UPC 0-40082-01228-7            | cETLus SJT 16/3 25 ft     | 1440 WATT<br>12A 120V | 4              | 1.03 CU ft           | 15.3 lbs         |

### UPL-25G

13 WATT PL LAMP, GROUNDED OUTLET, ON/OFF SWITCH BUILT INTO HANDLE, SWIVEL HANGING HOOK. 360° REMOVEABLE ROTATING MAGNET.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| UPC 0-40082-00442-8            | cULus SJT 16/3 25 ft      | 1440 WATT<br>12A 120V | 4              | .9 CU ft             | 15 lbs           |

### UPL-50G

13 WATT PL LAMP, GROUNDED OUTLET, ON/OFF SWITCH BUILT INTO HANDLE, ADJUSTABLE HANGING HOOK. 360° REMOVEABLE ROTATING MAGNET MOUNTING CLIP.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| UPC 0-40082-00490-9            | cULus SJT 16/3 50 ft      | 1440 WATT<br>12A 120V | 4              | .9 CU ft             | 22.2 lbs         |

### SF815

8W FLUORESCENT T5 LAMP, PUSH ON/OFF SWITCH IN HANDLE, HIGH-IMPACT HOUSING, POLYCARBONATE LENS WITH NON-GLARE SHADE, 2 FOLDING 360° SWIVEL HOOKS, FINGER GRIPS, TOP AND BOTTOM SHOCK CUSHIONS.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating   | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|---------------------|----------------|----------------------|------------------|
| UPC 0-40082-00537-1            | cULus SJT 18/2 15 ft      | 8 WATT<br>.12A 120V | 4              | .68 CU ft            | 8.8 lbs          |

### SF1415

14W FLUORESCENT T5 LAMP, ON/OFF SWITCH IN HANDLE, HIGH-IMPACT HOUSING, POLYCARBONATE LENS WITH NON-GLARE SHADE, 2 FOLDING 360° SWIVEL HOOKS, FINGER GRIPS, TOP AND BOTTOM SHOCK CUSHIONS.

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating    | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|----------------------|----------------|----------------------|------------------|
| UPC 0-40082-00538-8            | cETLus SJT 18/2 15 ft     | 14 WATT<br>.22A 120V | 4              | .93 CU ft            | 10 lbs           |



# Fluorescent Work Lights

*Energy-Saving Fluorescent Lamps...*



| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## **QPL-8**

FOUR 13 WATT PL STYLE LAMPS. TWO ON/OFF SWITCHES (ONE SWITCH FOR EACH PAIR OF LAMPS). ADJUSTABLE STAND BASE AND WALL MOUNT. MEASURES 10 1/4" X 8 1/2" X 4 5/8".

|                     |                  |                         |   |           |       |
|---------------------|------------------|-------------------------|---|-----------|-------|
| UPC 0-40082-01039-9 | SPT 18/2<br>8 ft | 52 WATT<br>120V 60HZ AC | 4 | 1.3 CU ft | 13lbs |
|---------------------|------------------|-------------------------|---|-----------|-------|

## **15FG-25**

15W FLOURESCENT LAMP WITH GROUNDED OUTLET, ON/OFF SWITCH BUILT INTO HANDLE, 2 FOLDING 360° SWIVEL HOOKS. TWO ADJUSTABLE MOUNTING STANDS INCLUDED. 15 WATT LAMP WITH NON-GLARE REFLECTOR.

|                     |                   |                       |   |           |          |
|---------------------|-------------------|-----------------------|---|-----------|----------|
| UPC 0-40082-00809-9 | SJT 16/3<br>25 ft | 1440 WATT<br>12A 120V | 4 | 1.4 CU ft | 18.1 lbs |
|---------------------|-------------------|-----------------------|---|-----------|----------|

† Display tray pack



# Retractable Fluorescent Work Light Reels



| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## **13RPL-20E**

13W FLUORESCENT LIGHT RETRACTABLE CORD REEL WITH DURABLE SHATTER RESISTANT REEL AND LAMP HOUSING. PLUG IN BALLAST. ON/OFF SWITCH BUILT INTO HANDLE. FOLDING SWIVEL HOOK. 13 WATT PL STYLE LAMP EASILY REPLACED WITHOUT TOOLS.

|                     |                   |                       |   |           |          |
|---------------------|-------------------|-----------------------|---|-----------|----------|
| UPC 0-40082-00443-5 | SJT 18/2<br>20 ft | 13 WATT<br>.350A 120V | 4 | 1.5 CU ft | 18.9 lbs |
|---------------------|-------------------|-----------------------|---|-----------|----------|

## **13RPL-40**

13W FLUORESCENT LIGHT RETRACTABLE CORD REEL. ON/OFF SWITCH AND BALLAST BUILT INTO LAMP HANDLE. ADJUSTABLE HANGING HOOK. 13 WATT PL STYLE LAMP WITH POWDER COATED METAL REEL HOUSING.

|                     |                   |                       |   |         |          |
|---------------------|-------------------|-----------------------|---|---------|----------|
| UPC 0-40082-00524-1 | SJT 18/2<br>40 ft | 13 WATT<br>.350A 125V | 4 | 2 CU ft | 39.6 lbs |
|---------------------|-------------------|-----------------------|---|---------|----------|

## **15RF-40**

15W RETRACTABLE FLUORESCENT LIGHT POWDER COATED STEEL CORD REEL WITH ON/OFF SWITCH IN HANDLE. PLUG IN BALLAST. SHATTER RESISTANT LAMP HOUSING. NON-GLARE LENS. HANGING HOOK SWIVELS 360°.

|                     |                   |                       |   |           |          |
|---------------------|-------------------|-----------------------|---|-----------|----------|
| UPC 0-40082-00435-0 | SJT 18/2<br>40 ft | 15 WATT<br>.305A 125V | 4 | 3.1 CU ft | 43.5 lbs |
|---------------------|-------------------|-----------------------|---|-----------|----------|



# Retractable Fluorescent Work Light Reels



| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## **8150AQ**

26W FLUORESCENT LAMP ON INDUSTRIAL GRADE THERMOPLASTIC REEL HOUSING, REMOVABLE STEEL MOUNTING BRACKET, CARRYING HANDLE, ON/OFF SWITCH AND GROUNDED OUTLET BUILT IN HANDLE, POWER "ON" INDICATOR LIGHT, TWO FOLDING SWIVEL HOOKS, NO TOOL BULB REPLACEMENT, REMOVEABLE ROTATING MAGNET.

|                     |                   |                       |   |           |          |
|---------------------|-------------------|-----------------------|---|-----------|----------|
| UPC 0-40082-98185-9 | SJT 16/3<br>50 ft | 1200 WATT<br>10A 120V | 2 | 2.1 CU ft | 30.7 lbs |
|---------------------|-------------------|-----------------------|---|-----------|----------|





## Retractable Fluorescent Work Light Reels

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

### 5000-40PL-SS

13W FLUORESCENT LIGHT POWDER COATED STEEL REEL WITH AUTOMATIC ON/OFF SWITCHING FEATURE. SHATTER-RESISTANT LAMP HOUSING. FOLDING SWIVEL HOOK. NO OUTLET.

MEETS N. E. C. 511 (f) FOR USE IN COMMERCIAL GARAGES. THE REEL MUST BE MOUNTED A MINIMUM OF 12' ABOVE THE FLOOR AND THE CORD AND LAMP HEAD MUST BE SUPPORTED SO THAT THEY ARE A MINIMUM OF 18" ABOVE FLOOR LEVEL.

|                     |                   |                       |   |         |          |
|---------------------|-------------------|-----------------------|---|---------|----------|
| UPC 0-40082-01020-7 | SJT 18/2<br>40 ft | 13 WATT<br>.305A 125V | 4 | 2 CU ft | 38.4 lbs |
|---------------------|-------------------|-----------------------|---|---------|----------|

### 13RF-30GR

13W FLUORESCENT LIGHT POWDER COATED STEEL REEL. BALLAST AND ON/OFF SWITCH BUILT IN HANDLE. 360° SWIVEL HOOK. POLYCARBONATE LENS W/ 270° ARC OF LIGHT. GROUNDED OUTLET IN HANDLE. NON-GLARE REFLECTOR.

|                     |                   |                       |   |         |        |
|---------------------|-------------------|-----------------------|---|---------|--------|
| UPC 0-40082-00523-4 | SJT 16/3<br>30 ft | 1250 WATT<br>10A 125V | 4 | 2 CU ft | 42 lbs |
|---------------------|-------------------|-----------------------|---|---------|--------|

### 5030AQ

POWDER COATED STEEL REEL WITH A 26 WATT FLUORESCENT PL TYPE LAMP, ON/OFF SWITCH AND GROUNDED OUTLET IN HANDLE, POWER "ON" INDICATOR LIGHT, 2 SWIVEL HOOKS, NO TOOL BULB REPLACEMENT, REMOVEABLE ROTATING MAGNET.

|                     |                   |                       |   |            |          |
|---------------------|-------------------|-----------------------|---|------------|----------|
| UPC 0-40082-01226-3 | SJT 16/3<br>30 ft | 1200 WATT<br>10A 120V | 4 | 2.33 CU ft | 42.7 lbs |
|---------------------|-------------------|-----------------------|---|------------|----------|



## Hand Held Halogen Work Lights

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

### HR-15

BRIGHT HALOGEN DIRECT BEAM LIGHT WITH 90° SWIVEL HEAD AND 360° ADJUSTABLE HANGING HOOK. ON/OFF SWITCH BUILT INTO HANDLE. COMPACT DESIGN.

|                     |                   |                      |                |          |        |
|---------------------|-------------------|----------------------|----------------|----------|--------|
| UPC 0-40082-01031-3 | SJT 18/2<br>15 ft | 20 WATT<br>.17A 125V | 6 <sup>+</sup> | .9 CU ft | 10 lbs |
|---------------------|-------------------|----------------------|----------------|----------|--------|



## Portable Multi-Plug Cord Tenders

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

### 7140A

40 FT. 16/3 SJTW WIND-UP CORD REEL WITH 4 CIRCUIT BREAKER PROTECTED GROUNDED OUTLETS. POWER "ON" INDICATOR LIGHT.

|                     |                   |                       |     |   |   |             |          |
|---------------------|-------------------|-----------------------|-----|---|---|-------------|----------|
| UPC 0-40082-01027-6 | SJT 16/3<br>40 ft | 1250 WATT<br>10A 125V | YES | 4 | 4 | 2.713 CU ft | 24.7 lbs |
|---------------------|-------------------|-----------------------|-----|---|---|-------------|----------|

### 7080M

POWDER COATED STEEL WIND-UP REEL WITH FOUR CIRCUIT BREAKER PROTECTED GROUNDED OUTLETS, ILLUMINATED ON/OFF RESET SWITCH AND SJTW FLEXIBLE COLD WEATHER CORD.

|                     |                   |                     |     |   |   |           |          |
|---------------------|-------------------|---------------------|-----|---|---|-----------|----------|
| UPC 0-40082-00824-2 | SJT 14/3<br>80 ft | 13 WATT<br>10A 125V | YES | 4 | 2 | 1.7 CU ft | 27.8 lbs |
|---------------------|-------------------|---------------------|-----|---|---|-----------|----------|

### 6000-25G

PORTABLE WIND-UP MULTI-PLUG REEL WITH 4 GROUNDED OUTLETS. BUILT-IN RESETTABLE CIRCUIT BREAKER. CONVENIENT CARRYING HANDLE.

|                     |                   |                       |     |   |   |          |          |
|---------------------|-------------------|-----------------------|-----|---|---|----------|----------|
| UPC 0-40082-00417-6 | SJT 16/3<br>25 ft | 1250 WATT<br>10A 125V | YES | 4 | 4 | .8 CU ft | 15.7 lbs |
|---------------------|-------------------|-----------------------|-----|---|---|----------|----------|



## Retractable Extension Cord Reels



**5000A-30GF**



**5000A-30GF-S**



**5000A-30GF-CB**

**5000M-30GF-CB**



| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

### 5000A-30GF

POWDER COATED STEEL RETRACTABLE CORD REEL HOUSING WITH THREE GROUNDED OUTLETS. POWER "ON" INDICATOR LIGHT.

|                     |                   |                   |                          |    |   |   |           |             |
|---------------------|-------------------|-------------------|--------------------------|----|---|---|-----------|-------------|
| UPC 0-40082-00412-1 | cUL <sub>us</sub> | SJT 16/3<br>30 ft | 1250<br>WATT<br>10A 125V | NO | 3 | 4 | 1.6 CU ft | 36.8<br>lbs |
|---------------------|-------------------|-------------------|--------------------------|----|---|---|-----------|-------------|

### 5000A-30GF-S

POWDER COATED STEEL RETRACTABLE REEL HOUSING WITH ONE GROUNDED OUTLET.

|                     |                   |                   |                          |    |   |   |           |             |
|---------------------|-------------------|-------------------|--------------------------|----|---|---|-----------|-------------|
| UPC 0-40082-00498-5 | cUL <sub>us</sub> | SJT 16/3<br>30 ft | 1250<br>WATT<br>10A 125V | NO | 1 | 4 | 1.6 CU ft | 35.4<br>lbs |
|---------------------|-------------------|-------------------|--------------------------|----|---|---|-----------|-------------|

### 5000A-30GF-CB

POWDER COATED STEEL RETRACTABLE CORD REEL HOUSING. POWER BLOCK WITH THREE GROUNDED OUTLETS AND BUILT IN RESETTABLE CIRCUIT BREAKER.

|                     |                   |                   |                          |     |   |   |           |             |
|---------------------|-------------------|-------------------|--------------------------|-----|---|---|-----------|-------------|
| UPC 0-40082-00445-9 | cUL <sub>us</sub> | SJT 16/3<br>30 ft | 1250<br>WATT<br>10A 125V | YES | 3 | 4 | 1.5 CU ft | 36.2<br>lbs |
|---------------------|-------------------|-------------------|--------------------------|-----|---|---|-----------|-------------|

### 5000M-30GF-CB

POWDER COATED STEEL RETRACTABLE CORD REEL HOUSING. POWER BLOCK WITH THREE GROUNDED OUTLETS, BUILT-IN RESETTABLE CIRCUIT BREAKER WITH HEAVY-DUTY 14/3 CORD.

|                     |                   |                    |                          |     |   |   |           |             |
|---------------------|-------------------|--------------------|--------------------------|-----|---|---|-----------|-------------|
| UPC 0-40082-00492-3 | cUL <sub>us</sub> | SJTW 14/3<br>30 ft | 1625<br>WATT<br>13A 125V | YES | 3 | 4 | 1.6 CU ft | 39.1<br>lbs |
|---------------------|-------------------|--------------------|--------------------------|-----|---|---|-----------|-------------|



## Retractable Extension Cord Reels



**5020TF-4C**

**5020TFC**

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

### 5020TF-4C

FOUR OUTLET HEAVY DUTY 20FT RETRACTABLE 12AWG EXTENSION CORD REEL WITH RUGGED POWDER COATED STEEL HOUSING, 15 AMP RESETTABLE CIRCUIT BREAKER PROTECTED 5-15P PLUG. FOUR 5-20R GROUNDED OUTLETS WITH POWER "ON" INDICATOR LIGHT. WALL OR CEILING MOUNT WITH INCLUDED HARDWARE.

|                     |                   |                     |                          |     |   |   |           |             |
|---------------------|-------------------|---------------------|--------------------------|-----|---|---|-----------|-------------|
| UPC 0-40082-01254-6 | cUL <sub>us</sub> | SJTOW<br>12/3 20 ft | 1875<br>WATT<br>15A 125V | YES | 4 | 4 | 1.8 CU ft | 41.4<br>lbs |
|---------------------|-------------------|---------------------|--------------------------|-----|---|---|-----------|-------------|

### 5020TFC

SINGLE OUTLET HEAVY DUTY 20FT RETRACTABLE EXTENSION CORD REEL WITH RUGGED POWDER COATED STEEL HOUSING, 15 AMP RESETTABLE CIRCUIT BREAKER PROTECTED 5-15P PLUG, AND CLEAR-SINGLE 5-20R ILLUMINATED GROUNDED OUTLET. WALL OR CEILING MOUNT WITH INCLUDED HARDWARE.

|                     |                   |                     |                          |     |   |   |           |             |
|---------------------|-------------------|---------------------|--------------------------|-----|---|---|-----------|-------------|
| UPC 0-40082-01255-3 | cUL <sub>us</sub> | SJTOW<br>12/3 20 ft | 1875<br>WATT<br>15A 125V | YES | 1 | 4 | 1.8 CU ft | 39.1<br>lbs |
|---------------------|-------------------|---------------------|--------------------------|-----|---|---|-----------|-------------|



# Retractable Extension Cord Reels & Portable Multi-plug Cord Tenders



| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

## 8140T-P

HEAVY-DUTY INDUSTRIAL GRADE REEL HOUSING, QUICK RELEASE STEEL MOUNTING BRACKET, CONVENIENT CARRYING HANDLE, TRI-TAP WITH 3 GROUNDED OUTLETS WITH POWER "ON" INDICATOR LIGHT & BUILT IN CIRCUIT BREAKER. 40 FT. SJTOW 12/3 CORD.

|                     |    |                     |                          |     |   |   |           |        |
|---------------------|----|---------------------|--------------------------|-----|---|---|-----------|--------|
| UPC 0-40082-43071-5 | us | SJTOW<br>12/3 40 ft | 1875<br>WATT<br>15A 125V | YES | 3 | 2 | 1.6 CU ft | 31 lbs |
|---------------------|----|---------------------|--------------------------|-----|---|---|-----------|--------|

## 8150M-P

HEAVY-DUTY INDUSTRIAL GRADE REEL HOUSING, QUICK RELEASE STEEL MOUNTING BRACKET, CONVENIENT CARRYING HANDLE, TRI-TAP WITH 3 GROUNDED OUTLETS WITH POWER "ON" INDICATOR LIGHT & BUILT IN CIRCUIT BREAKER. 50 FT. SJTOW 14/3 CORD.

|                     |    |                     |                          |     |   |   |           |        |
|---------------------|----|---------------------|--------------------------|-----|---|---|-----------|--------|
| UPC 0-40082-43072-2 | us | SJTOW<br>14/3 50 ft | 1625<br>WATT<br>13A 125V | YES | 3 | 2 | 1.6 CU ft | 25 lbs |
|---------------------|----|---------------------|--------------------------|-----|---|---|-----------|--------|

## 8675MFT

HEAVY-DUTY INDUSTRIAL GRADE REEL HOUSING, REMOVEABLE STEEL MOUNTING BRACKET, CONVENIENT CARRYING HANDLE, CIRCUIT BREAKER PROTECTED LIGHTED TRI-TAP WITH PUSH BUTTON LOCKING CENTER OUTLET.

|                     |          |                     |                          |     |   |   |           |         |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|---------|
| UPC 0-40082-42067-8 | Intertek | SJTOW<br>14/3 75 ft | 1250<br>WATT<br>10A 125V | YES | 3 | 2 | 1.9 CU ft | 39.7lbs |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|---------|

## 8665TFS

HEAVY-DUTY INDUSTRIAL GRADE REEL HOUSING, REMOVEABLE STEEL MOUNTING BRACKET, CONVENIENT CARRYING HANDLE, CIRCUIT BREAKER PROTECTED, LIGHTED CLEAR 5-15/20 SINGLE OUTLET.

|                     |          |                     |                          |     |   |   |           |        |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|--------|
| UPC 0-40082-43059-3 | Intertek | SJTOW<br>12/3 65 ft | 1875<br>WATT<br>15A 125V | YES | 1 | 2 | 1.9 CU ft | 44 lbs |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|--------|

## 8665TFQ

HEAVY-DUTY INDUSTRIAL GRADE REEL HOUSING, REMOVEABLE STEEL MOUNTING BRACKET, CONVENIENT CARRYING HANDLE, CIRCUIT BREAKER PROTECTED, FANNED QUAD 4 GROUNDED OUTLETS WITH LED POWER "ON" INDICATOR.

|                     |          |                     |                          |     |   |   |           |          |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|----------|
| UPC 0-40082-43060-9 | Intertek | SJTOW<br>12/3 65 ft | 1875<br>WATT<br>15A 125V | YES | 4 | 2 | 1.9 CU ft | 46.3 lbs |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|----------|

## 8645TFI

HEAVY-DUTY INDUSTRIAL GRADE REEL HOUSING, REMOVEABLE STEEL MOUNTING BRACKET, CONVENIENT CARRYING HANDLE, ILLUMINATED CLEAR 5-15/20 SINGLE OUTLET POWER BLOCK WITH LED POWER "ON" INDICATOR. 20A IN-LINE CIRCUIT BREAKER AND NEMA 5-20 MALE PLUG ON PIGTAIL.

|                     |          |                     |                          |     |   |   |           |          |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|----------|
| UPC 0-40082-43061-6 | Intertek | SJTOW<br>12/3 45 ft | 2500<br>WATT<br>20A 125V | YES | 1 | 2 | 1.9 CU ft | 37.5 lbs |
|---------------------|----------|---------------------|--------------------------|-----|---|---|-----------|----------|





# Weather Proof NEMA 3R Reels



5330M-SW  
5320T-SW

5220T-D  
5220T-DH



9100HT

7100HD

7100CC

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|--------------------|-------------------|----------------|------------------|
|--------------------------------|---------------------------|-------------------|--------------------|-------------------|----------------|------------------|

## 5330M-SW

INDOOR/OUTDOOR RETRACTABLE EXTENSION CORD REEL WITH 30 FT, SJTOOW 14/3 WIRE. WATERTIGHT NEMA 5-15C CONNECTOR. RAINPROOF NEMA 3R ENCLOSURE, UL94V-0, UV RESISTANT. STAINLESS STEEL FASTENERS. STATIONARY L-BRACKET\* IS COATED FOR OUTDOOR EXPOSURE, WET LOCATION. 5FT SJTOOW 14/3 PIGTAIL WITH LIGHTED MALE. 13 AMP RESETTABLE CIRCUIT BREAKER.

UPC 0-40082-43112-5



SJTOOW  
14/3 30 ft

1625  
WATT  
13A 125V

YES

1

4

47.7lbs

## 5320T-SW

INDOOR/OUTDOOR RETRACTABLE EXTENSION CORD REEL WITH 20 FT, SJTOOW 12/3 WIRE. WATERTIGHT NEMA 5-15C CONNECTOR. RAINPROOF NEMA 3R ENCLOSURE, UL94V-0, UV RESISTANT. STAINLESS STEEL FASTENERS. STATIONARY L-BRACKET\* IS COATED FOR OUTDOOR EXPOSURE, WET LOCATION. 5FT SJTOOW 12/3 PIGTAIL WITH LIGHTED MALE. 15 AMP RESETTABLE CIRCUIT BREAKER.

UPC 0-40082-43111-8



SJTOOW  
12/3 20 ft

1875  
WATT  
15A 125V

YES

1

4

48.5lbs

## 5220T-D

INDOOR RETRACTABLE EXTENSION CORD REEL WITH 20 FT, SJTOOW 12/3 WIRE. DUAL DUPLEX PENDANT BOX. RUGGED SEALED ENCLOSURE. STAINLESS STEEL FASTENERS. POWDER COATED STATIONARY L-BRACKET\*. 5FT SJTOOW 12/3 PIGTAIL WITH LIGHTED MALE. 15 AMP RESETTABLE CIRCUIT BREAKER.

UPC 0-40082-43114-9



SJTOOW  
12/3 20 ft

1875  
WATT  
15A 125V

YES

4

4

52.8lbs

## 5220T-DH

INDOOR RETRACTABLE EXTENSION CORD REEL WITH 20 FT, SJTOOW 12/3 WIRE. DUAL DUPLEX PENDANT BOX, HOSPITAL GRADE PLUG AND RECEPTACLES. RUGGED SEALED ENCLOSURE. STAINLESS STEEL FASTENERS. POWDER COATED STATIONARY L-BRACKET\*. 5FT SJTOOW 12/3 PIGTAIL WITH LIGHTED MALE. 15 AMP RESETTABLE CIRCUIT BREAKER.

UPC 0-40082-43115-6



SJTOOW  
12/3 20 ft

1875  
WATT  
15A 125V

YES

4

4

52.8lbs

\*Additional Bracket Options Available

# Retractable Extension Cord Reels & Portable Multi-plug Cord Tenders

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/<br>Length | Maximum<br>Rating | Circuit<br>Breaker | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|
|--------------------------------|-------------------------------|-------------------|--------------------|-------------------|----------------|--------------------|------------------|

## 9100HT

HEAVY-DUTY PORTABLE WIND-UP POWER CORD REEL, TUBULAR CONSTRUCTION. BUILT-IN 15-AMP CIRCUIT BREAKER. FOUR NEMA 5-20R RECEPTACLES. ACCEPTS 15 AMP OR 20 AMP PLUGS. ILLUMINATED POWER "ON" INDICATOR. HOLDS 100 FT. 12/3 OR 10/3 CORD SETS. ADJUSTABLE CLUTCH-NUT TO CONTROL FRICTION.

UPC 0-40082-01025-2



N/A

1875  
WATT  
15A 120V

YES

4

1

2.6 CU ft

12.8  
lbs

## 7100CC

HEAVY DUTY PORTABLE WIND-UP REEL, TUBULAR STEEL BASE AND ERGONOMIC NON-CONDUCTIVE CARRY HANDLE, ADJUSTABLE CLUTCH NUT TO ADJUST REEL FRICTION, WIRE GUIDE. HOLDS UP TO 100FT 12/3 SO EXTENSION CORDS. ALSO HOLDS/DISPENSES CABLE, WIRE, ROPE, TUBING AND HOSE.

UPC 0-40082-01243-0

N/A

N/A

NO

0

1

1.7 CU ft

9 lbs

## 7100HD

HEAVY DUTY PORTABLE WIND-UP REEL WITH 4 NEMA 5-20R OUTLETS, 15 AMP CIRCUIT BREAKER AND ILLUMINATED POWER "ON" INDICATOR. TUBULAR STEEL BASE AND ERGONOMIC NON-CONDUCTIVE CARRY HANDLE, ADJUSTABLE CLUTCH-NUT TO CONTROL FRICTION, WIRE GUIDE. HOLDS UP TO 100FT 12/3 SO EXTENSION CORDS.

UPC 0-40082-01244-7



N/A

1875  
WATT  
15A 120V

YES

4

1

1.7 CU ft

10.2  
lbs



**MCC2201**



**WC-625  
WC-650  
WC-6100**



**WC-425  
WC-450  
WC-4100**



**WCT-225  
WCT-250  
WCT-2100**

## Retractable Data Reels

| Catalog No.<br>Description/UPC                                                                                                                                                                                    | Wire Type<br>Length | Plug Type    | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------|----------------|----------------------|------------------|
| <b>MCC2201</b><br>20FT RETRACTABLE CAT6 REEL. TANGLE FREE COMPACT CABLE STORAGE, RUGGED POWDER COATED REEL WITH 7.5"- 9" MOUNTING BRACKET. MOUNTS HORIZONTALLY OR VERTICALLY. HARDWARE AND INSTRUCTIONS INCLUDED. |                     |              |                |                      |                  |
| <b>UPC 0-40082-01253-9</b>                                                                                                                                                                                        | CAT6<br>20 ft       | Modular RJ46 | 4              | .9 CU ft             | 13 lbs           |

## Extension Cords

### Indoor/Outdoor

| Catalog No.<br>Description/UPC                                                                                                                                     | Cord Type<br>Gauge/Length | Maximun<br>Rating | Master<br>Pack  | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-------------------|-----------------|----------------------|------------------|
| <b>WC-625</b><br>SINGLE GROUNDED OUTLET.  SJTW 16/3 25 ft 1625 WATT 13A 125V     |                           |                   | 12 <sup>+</sup> | .9 CU ft             | 23 lbs           |
| <b>UPC 0-40082-01040-5</b>                                                                                                                                         |                           |                   |                 |                      |                  |
| <b>WC-650</b><br>SINGLE GROUNDED OUTLET.  SJTW 16/3 50 ft 1625 WATT 13A 125V    |                           |                   | 6 <sup>+</sup>  | .8 CU ft             | 23.2 lbs         |
| <b>UPC 0-40082-01041-2</b>                                                                                                                                         |                           |                   |                 |                      |                  |
| <b>WC-6100</b><br>SINGLE GROUNDED OUTLET.  SJTW 16/3 100 ft 1250 WATT 10A 125V |                           |                   | 4 <sup>+</sup>  | 1.0 CU ft            | 29.5 lbs         |
| <b>UPC 0-40082-01042-9</b>                                                                                                                                         |                           |                   |                 |                      |                  |

### Heavy Duty Indoor/Outdoor

| Catalog No.<br>Description/UPC                                                                                                                                     | Cord Type<br>Gauge/Length | Maximun<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
| <b>WC-425</b><br>SINGLE GROUNDED OUTLET.  SJTW 14/3 25 ft 1875 WATT 15A 125V   |                           |                   | 8 <sup>+</sup> | .6 CU ft             | 20 lbs           |
| <b>UPC 0-40082-99015-8</b>                                                                                                                                         |                           |                   |                |                      |                  |
| <b>WC-450</b><br>SINGLE GROUNDED OUTLET.  SJTW 14/3 50 ft 1875 WATT 15A 125V   |                           |                   | 6 <sup>+</sup> | .7 CU ft             | 29.3 lbs         |
| <b>UPC 0-40082-99016-5</b>                                                                                                                                         |                           |                   |                |                      |                  |
| <b>WC-4100</b><br>SINGLE GROUNDED OUTLET.  SJTW 14/3 100 ft 1625 WATT 13A 125V |                           |                   | 2 <sup>+</sup> | .4 CU ft             | 19.6 lbs         |
| <b>UPC 0-40082-99017-2</b>                                                                                                                                         |                           |                   |                |                      |                  |

### Extra Heavy Duty Indoor/Outdoor

| Catalog No.<br>Description/UPC                                                                                                                                      | Cord Type<br>Gauge/Length | Maximun<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
| <b>WCT-225</b><br>THREE GROUNDED OUTLETS.  SJTW 12/3 25 ft 1875 WATT 15A 125V   |                           |                   | 8 <sup>+</sup> | 1.0 CU ft            | 32.7 lbs         |
| <b>UPC 0-40082-99021-9</b>                                                                                                                                          |                           |                   |                |                      |                  |
| <b>WCT-250</b><br>THREE GROUNDED OUTLETS.  SJTW 12/3 50 ft 1875 WATT 15A 125V   |                           |                   | 4 <sup>+</sup> | .8 CU ft             | 29.2 lbs         |
| <b>UPC 0-40082-99022-6</b>                                                                                                                                          |                           |                   |                |                      |                  |
| <b>WCT-2100</b><br>THREE GROUNDED OUTLETS.  SJTW 12/3 100 ft 1625 WATT 13A 125V |                           |                   | 2 <sup>+</sup> | .8 CU ft             | 29.6 lbs         |
| <b>UPC 0-40082-99023-3</b>                                                                                                                                          |                           |                   |                |                      |                  |

# Extension Cord Storage Devices



500 WR



7000 WR

## Storage Devices

| Catalog No.<br>Description/UPC                                              | Description                                                                                                                                                                                                         | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------|------------------|
| <b>500 WR</b><br>WRAP N CARRY™<br>UPC 0-40082-00449-7                       | STORES UP TO 100 FEET OF 16/3 ELECTRICAL CORD. BUILT-IN STORAGE COMPARTMENTS IN EACH END OF CORD TENDER.                                                                                                            | 9              | 1.8 CU ft            | 7 lbs            |
| <b>7000 WR</b><br>PRO REEL™ WIND-UP<br>PORTABLE REEL<br>UPC 0-40082-00448-0 | PORTABLE REEL STORES UP TO 100 FEET OF 12/3; 125 FEET OF 14/3; 150 FEET OF 16/3 ELECTRICAL CORD. WILL HOLD WIRE, ROPE, TUBING AND HOSE. INCLUDES REMOVEABLE WALL MOUNT BRACKETS FOR PORTABILITY. CORD NOT INCLUDED. | 4              | 4.3 CU ft            | 15.6 lbs         |



# Temporary Light Strings

Molded-on weather-resistant lamp sockets with durable plastic or metal bulb guards spaced on 10-foot centers, each socket rated 150 watts maximum. **Meets OSHA Requirements.**



TLS-100J2



TLS-50J3




TPL-25  
TPL-50

## Triple Outlet with Resettable Circuit Breaker

| Catalog No.<br>Description/UPC                                                                                                                                                     | Cord Type<br>Gauge/Length | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------|----------------|----------------------|------------------|
| <b>TLS-100J2</b><br>NON-LINKABLE.<br>UPC 0-40082-00481-7                                                                                                                           | SJTW 14/2<br>100 ft       | 1500 WATT<br>12A 125V | 1              | 1.1 CU ft            | 12.7 lbs         |
| <b>TLS-50</b><br>LINKABLE<br>UPC 0-40082-00482-4                                                                                                                                   | STW 12/3<br>50 ft         | 1875 WATT<br>15A 125V | 2              | 1 CU ft              | 14 lbs           |
| <b>TLS-100</b><br>LINKABLE.<br>UPC 0-40082-00483-1                                                                                                                                 | STW 12/3<br>100 ft        | 1875 WATT<br>15A 125V | 1              | 1.8 CU ft            | 29.7 lbs         |
| <b>TLS-50J3</b><br>LINKABLE METAL CAGES<br>INSTALLED.<br>UPC 0-40082-00484-8                                                                                                       | SJTW 12/3<br>50 ft        | 1875 WATT<br>15A 125V | 2              | 1.7 CU ft            | 13.8 lbs         |
| <b>TLS-100J3</b><br>LINKABLE<br>METAL CAGES INSTALLED.<br>UPC 0-40082-00486-5                                                                                                      | SJTW 12/3<br>100 ft       | 1875 WATT<br>15A 125V | 1              | 3.7 CU ft            | 26.9 lbs         |
| <b>TPL-25</b><br>SINGLE STANDARD SOCKET TEMPORARY PENDANT LIGHT. SOLID RUBBER HANDLE<br>MOLDED TO CORD. POLYCARBONATE VENTED CLEAR GUARD, SWIVEL HANG HOOK.<br>UPC 0-40082-00526-5 | SOOW 16/2<br>25 ft        | 75 WATT<br>120V       | 6              | 2.5 CU ft            | 20 lbs           |
| <b>TPL-50</b><br>SINGLE STANDARD SOCKET TEMPORARY PENDANT LIGHT. SOLID RUBBER HANDLE<br>MOLDED TO CORD. POLYCARBONATE VENTED CLEAR GUARD, SWIVEL HANG HOOK.<br>UPC 0-40082-00527-2 | SOOW 16/2<br>50 ft        | 75 WATT<br>120V       | 4              | 2.1 CU ft            | 22.7 lbs         |



# Outdoor Extension Cords

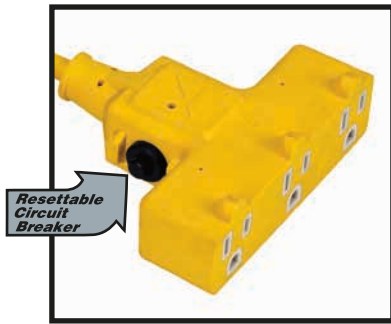

## Triple Outlet with Resettable Circuit Breaker

| Catalog No.<br>Description/UPC         | Cord Type<br>Gauge/Length            | Maximum<br>Rating     | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|----------------------------------------|--------------------------------------|-----------------------|----------------|----------------------|------------------|
| <b>CST-6M</b><br>UPC 0-40082-01010-8   | UL <sub>US</sub> SJTW 14/3<br>6 ft   | 1625 WATT<br>13A 125V | 12‡            | .7 CU ft             | 13.3 lbs         |
| <b>CST-25M</b><br>UPC 0-40082-00961-4  | UL <sub>US</sub> SJTW 14/3<br>25 ft  | 1625 WATT<br>13A 125V | 12‡            | 1.3 CU ft            | 36.4 lbs         |
| <b>CST-50M</b><br>UPC 0-40082-00964-5  | UL <sub>US</sub> SJTW 14/3<br>50 ft  | 1625 WATT<br>13A 125V | 6‡             | 1.4 CU ft            | 33.5 lbs         |
| <b>CST-6T</b><br>UPC 0-40082-01000-9   | UL <sub>US</sub> SJTW 12/3<br>6 ft   | 1875 WATT<br>15A 125V | 12‡            | .7 CU ft             | 18.6 lbs         |
| <b>CST-25T</b><br>UPC 0-40082-00962-1  | UL <sub>US</sub> SJTW 12/3<br>25 ft  | 1875 WATT<br>15A 125V | 6‡             | .8 CU ft             | 24.3 lbs         |
| <b>CST-50T</b><br>UPC 0-40082-00965-2  | UL <sub>US</sub> SJTW 12/3<br>50 ft  | 1875 WATT<br>15A 125V | 6‡             | 1.2 CU ft            | 45.3 lbs         |
| <b>CST-100T</b><br>UPC 0-40082-00968-3 | UL <sub>US</sub> SJTW 12/3<br>100 ft | 1625 WATT<br>13A 125V | 2‡             | .9 CU ft             | 28.4 lbs         |

‡ DISPLAY TRAY PACK



# Commercial/Construction Site Products

## Portable Ground Fault Circuit Interrupters

Ground fault circuit interrupters (GFCI) detect electrical leakage which could result in electrical shock. When detected the GFCI "shuts off" the power instantly.

**Meets OSHA Requirements.**



| Catalog No.<br>Description/UPC                                                                                                                              | Cord Type<br>Gauge/Length           | Maximum<br>Rating     | No. of<br>Outlets | Master<br>Pack | Master<br>Cubic Ft | Master<br>Weight |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|-------------------|----------------|--------------------|------------------|
| <b>4115-6GF</b><br>TWO GFCI PROTECTED 5-15R GROUNDED OUTLETS WITH OUTLET COVERS.<br>UPC 0-40082-00461-9                                                     | UL <sub>US</sub> SJTW 12/3<br>6 ft  | 1875 WATT<br>15A 125V | 2                 | 4              | .4 CU ft           | 9.1 lbs          |
| <b>4215-6GF</b><br>FOUR GFCI PROTECTED 5-15R GROUNDED OUTLETS WITH OUTLET COVERS.<br>UPC 0-40082-00459-6                                                    | UL <sub>US</sub> SJTW 12/3<br>6 ft  | 1875 WATT<br>15A 125V | 4                 | 4              | .5 CU ft           | 10 lbs           |
| <b>GFT-2T</b><br>GFCI PROTECTED 5-15P PLUG WITH CIRCUIT BREAKER PROTECTED 5-15R TRIPLE GROUNDED OUTLET POWER BLOCK.<br>UPC 0-40082-00444-2                  | UL <sub>US</sub> SJTW 12/3<br>2 ft  | 2500 WATT<br>20A 125V | 3                 | 8‡             | .7 CU ft           | 10.3 lbs         |
| <b>6000-20G-GF</b><br>GROUND FAULT CIRCUIT PROTECTED PORTABLE OUTLET REEL, RUGGED THERMOPLASTIC ENCLOSURE, 2 GROUNDED OUTLETS, OSHA.<br>UPC 0-40082-00417-6 | UL <sub>US</sub> SJTW 14/3<br>20 ft | 1800 WATT<br>15A 125V | 2                 | 4              | 1.2 CU ft          | 16.8 lbs         |

**ALL ALERT PORTABLE GROUND FAULT CIRCUIT INTERRUPTERS ARE DESIGNED TO MEET OSHA REQUIREMENTS FOR ELECTRICAL PROTECTION IN THE WORKPLACE (ARTICLE 305, NATIONAL ELECTRIC CODE).**

‡ DISPLAY TRAY PACK

# Incandescent Clamp Lamps



**MCL6P**

| Catalog No.<br>Description/UPC                                                                                                                                                                                               | Cord Type<br>Gauge/Length                                                                           | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------|----------------|----------------------|------------------|
| <b>MCL6P</b><br>4 IN 1 INCANDESCENT WORK LIGHT; STICK IT, CLAMP IT, HANG IT OR STAND IT. ALUMINUM REFLECTOR SHADE, MAGNETIC BASE, CLAMP, HANGING HOOK AND STAND BASE WITH REMOVABLE LEGS, 18/2 SPT2 CORD, 60 WATT MAX. BULB. |  SJTW 18/2<br>6 ft | 60 WATT<br>120V   | 4              | 1 CU ft              | 8.25 lbs         |
| <b>UPC 0-40082-00516-6</b>                                                                                                                                                                                                   |                                                                                                     |                   |                |                      |                  |

## RLS-6MC

CLAMP LIGHT WITH 5½" ALUMINUM REFLECTOR SHADE. SWIVEL SPRING CLAMP HOLDS SOCKET IN ANY POSITION. SPRING CLAMP HAS PROTECTIVE COVERING AND 6' CORD.

|                            |                                                                                                      |                 |     |          |         |
|----------------------------|------------------------------------------------------------------------------------------------------|-----------------|-----|----------|---------|
| <b>UPC 0-40082-00500-5</b> |  SPT2 18/2<br>6 FT. | 60 WATT<br>125V | 12‡ | .7 CU ft | 8.8 lbs |
|----------------------------|------------------------------------------------------------------------------------------------------|-----------------|-----|----------|---------|



**RLS-6MC**

## RL-6MC

CLAMP LIGHT WITH 8½" ALUMINUM REFLECTOR SHADE. SWIVEL SPRING CLAMP HOLDS SOCKET IN ANY POSITION. SPRING CLAMP HAS PROTECTIVE COVERING AND 6' CORD.

|                            |                                                                                                      |                  |     |          |         |
|----------------------------|------------------------------------------------------------------------------------------------------|------------------|-----|----------|---------|
| <b>UPC 0-40082-00456-5</b> |  SPT2 18/2<br>6 FT. | 150 WATT<br>125V | 12‡ | .9 CU ft | 9.9 lbs |
|----------------------------|------------------------------------------------------------------------------------------------------|------------------|-----|----------|---------|

## RLG-6MC

CLAMP LIGHT WITH 10½" ALUMINUM REFLECTOR SHADE. SWIVEL SPRING CLAMP HOLDS SOCKET IN ANY POSITION. SPRING CLAMP HAS PROTECTIVE COVERING AND 6' CORD.

|                            |                                                                                                        |                  |     |           |        |
|----------------------------|--------------------------------------------------------------------------------------------------------|------------------|-----|-----------|--------|
| <b>UPC 0-40082-00501-2</b> |  SPT2 18/2<br>6 FT. | 150 WATT<br>125V | 12‡ | 1.3 CU ft | 11 lbs |
|----------------------------|--------------------------------------------------------------------------------------------------------|------------------|-----|-----------|--------|

‡ DISPLAY TRAY PACK



**RL-6MC**



**RLG-6MC**

# Incandescent Clamp Lamps



**HRL-12MC**

| Catalog No.<br>Description/UPC | Cord Type<br>Gauge/Length | Maximum<br>Rating | Master<br>Pack | Master<br>Cubic Feet | Master<br>Weight |
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|
|--------------------------------|---------------------------|-------------------|----------------|----------------------|------------------|

## HRL-12MC

CLAMP LIGHT WITH 8½" ALUMINUM REFLECTOR SHADE. SWIVEL SPRING CLAMP HOLDS SOCKET IN ANY POSITION AND HAS PROTECTIVE COVERING. HEAVY-DUTY CLAMP AND 12-FOOT CORD.

|                            |                                                                                                       |                  |    |           |         |
|----------------------------|-------------------------------------------------------------------------------------------------------|------------------|----|-----------|---------|
| <b>UPC 0-40082-00812-9</b> |  SPT 18/2<br>12 FT. | 150 WATT<br>125V | 6‡ | 2.2 CU ft | 9.7 lbs |
|----------------------------|-------------------------------------------------------------------------------------------------------|------------------|----|-----------|---------|

## RLB-6MC

300 WATT 10" BROODER LAMP, ALUMINUM REFLECTOR SHADE WITH BULB GUARD. HEAT RESISTANT PORCELAIN SOCKET WITH METAL HANGING LOOP AND SWIVEL SPRING CLAMP THAT HOLDS SOCKET IN ANY POSITION AND HAS PROTECTIVE COVERING. ASSEMBLED.

|                            |                                                                                                     |                  |    |           |         |
|----------------------------|-----------------------------------------------------------------------------------------------------|------------------|----|-----------|---------|
| <b>UPC 0-40082-00454-1</b> |  SJT 18/2<br>6 ft | 300 WATT<br>125V | 4‡ | 1.2 CU ft | 6.7 lbs |
|----------------------------|-----------------------------------------------------------------------------------------------------|------------------|----|-----------|---------|

## RLB-8H

300 WATT 10" HANGING BROODER LAMP, ALUMINUM REFLECTOR, INCLUDES HANGING LOOP & WIRE BULB GUARD, HEAT RESISTANT CERAMIC SOCKET, ASSEMBLED.

|                            |                                                                                                     |                  |    |           |         |
|----------------------------|-----------------------------------------------------------------------------------------------------|------------------|----|-----------|---------|
| <b>UPC 0-40082-01257-7</b> |  SJT 18/2<br>8 ft | 300 WATT<br>125V | 4‡ | 1.2 CU ft | 5.3 lbs |
|----------------------------|-----------------------------------------------------------------------------------------------------|------------------|----|-----------|---------|

‡ DISPLAY TRAY PACK



**RLB-6MC**



**RLB-8H**





# Replacement Parts



## FLUORESCENT; HANDHELD AND REELS

| MODEL NUMBER    | LENS  | HOOK          | BULB  | SWITCH | BALLAST | MAGNET |
|-----------------|-------|---------------|-------|--------|---------|--------|
| EPL-6           | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| EPL-15 cULus    | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| EPL-50 cULus    | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| EPL-25NS        | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| UPL-6G          | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| UPL-25G cULus   | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| UPL-50G cULus   | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| QXL-6G          | L-9   | H-6           | PLC-4 | NA     | NA      | MMC-5  |
| QXL-25G         | L-9   | H-6           | PLC-4 | NA     | NA      | MMC-5  |
| 15F-25          | 15F-2 | NA            | FL-15 | CH-2   | 15F-6C  | NA     |
| 15F-50          | 15F-2 | NA            | FL-15 | CH-2   | 15F-6C  | NA     |
| 15FG-25         | NA    | 15FG<br>15F-4 | FL-15 | CH-2   | NA      | NA     |
| SF815           | SF-3  | H-3           | SF-4  | NA     | NA      | NA     |
| SF1415          | SF-5  | H-3           | SF-6  | NA     | NA      | NA     |
| QPL-8           | L-3   | NA            | PLC-1 | CH-4   | CB-1    | NA     |
| 3230EF          | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| 3225UFC         | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| 13RPL-20E       | L-1   | H-3           | PLC-1 | CH-3   | 13F-6C  | MMC-1  |
| 13RPL-40 cULus  | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| 13RF-30GR cULus | L-1   | H-3           | PLC-1 | CH-3   | 13F-6   | MMC-1  |
| 15RF-40         | 15F-2 | 15F-5         | FL-15 | CH-2   | 15F-6C  | NA     |
| 5000-40PL-SS    | L-1   | H-3           | PLC-1 | NA     | 13F-6C  | MMC-1  |
| 5030AQ          | L-9   | H-6           | PLC-4 | NA     | NA      | MMC-5  |
| 8050AQ          | L-9   | H-6           | PLC-4 | NA     | NA      | MMC-5  |

## FLUORESCENT; RECHARGEABLE

| MODEL NUMBER | LAMP  | BATTERY |
|--------------|-------|---------|
| PLR-13       | PLC-2 | B-R13   |

## LED CORDLESS RECHARGEABLE AND BATTERY OPERATED

| MODEL NUMBER | CHARGER        | BATTERY | LENS  | HOOK | MAGNET/MOUNT                 |
|--------------|----------------|---------|-------|------|------------------------------|
| SWR100R      | UT-1           | NA      | NA    | NA   | NA                           |
| OSL2600      | NA             | NA      | NA    | NA   | 200037                       |
| KMB14S       | NA             | KB-3    | KB-1  | H-8  | NA                           |
| KTB14S       | NA             | KB-3    | KB-1  | H-8  | NA                           |
| KSR3000      | NA             | NA      | KR-30 | H-3  | MMC-1                        |
| KTR3C        | NA             | NA      | KR-30 | H-3  | MMC-1                        |
| KCR5         | UT-1           | NA      | L-3C  | H-3C | NA                           |
| KCR10        | UT-10C         | NA      | NA    | NA   | NA                           |
| KWR6CT       | UT-K6CT        | NA      | NA    | NA   | NA                           |
| LER48C       | T-413 C-3      | NA      | L-48  | NA   | NA                           |
| LHR5200      | TM-40          | NA      | NA    | NA   | BK-TH52 Charge Cord<br>U-CD2 |
| THR4000      | TM-40<br>CD-40 | BP-52   | NA    | NA   | BK-TH40                      |
| KWR12        | KWR6-<br>T01   | NA      | NA    | NA   | MB-KWR6                      |

## LED CORDED

| MODEL NUMBER | LENS | HOOK | MAGNET | MOUNT |
|--------------|------|------|--------|-------|
| KSM1812      | KS-1 | H-3  | NA     | NA    |
| KSM3015      | KR-1 | H-3  | MMC-1  | NA    |
| KSM3415      | KR-2 | H-3  | MMC-1  | NA    |
| LES3215G     | L-50 | KC-3 | MMC-50 | NA    |

## LED CORDED (continued)

| MODEL NUMBER | LENS | HOOK | MAGNET | MOUNT |
|--------------|------|------|--------|-------|
| KTM3315G     | NA   | KC-3 | NA     | NA    |
| KCL515       | L-3C | H-3C | NA     | NA    |
| KCL815       | L-8C | H-3C | NA     | NA    |
| LEC30-15     | L-6  | NA   | NA     | NA    |
| RTL30        | RL-2 | H-10 | NA     | RL-1  |
| RTL30SM      | RL-2 | H-10 | NA     | RL-1  |
| RTL10SB      | RL-3 | H-10 | NA     | RL-1  |
| 920LSM       | KS-1 | H-3  | NA     | NA    |
| 5050SM       | KR-2 | H-3  | MMC-1  | NA    |
| 5050CL8      | L-8C | H-3C | NA     | NA    |
| 5030AS       | L-50 | KC-3 | MMC-50 | NA    |
| 5030AM       | NA   | NA   | NA     | NA    |
| 8150AM       | NA   | KC-3 | NA     | NA    |

## LED FLOOD LIGHTS

| MODEL NUMBER | STAND/BASE | SIDE KNOB | ASSEMBLY BOLTS | HANDLE  | TRIPOD | CHARGER |
|--------------|------------|-----------|----------------|---------|--------|---------|
| LF63S        | LF-63H     | LF-63K    | LF-50B         | NA      | TS500  | NA      |
| LF84S        | LF-84H     | LF-84K    | LF-50B         | NA      | TS500  | NA      |
| LF120S       | LF-120H    | LF-120K   | LF-50B         | NA      | TS500  | NA      |
| LF168ST      | NA         | LF-84K    | NA             | LF250-H | TS500  | NA      |
| LF240ST      | NA         | LF-120K   | NA             | LF250-H | TS500  | NA      |
| LEP48S       | BK-100     | K-1       | NA             | NA      | NA     | NA      |
| LF50CM       | LF-50H     | LF-50K    | LF-50B         | NA      | TS500  | NA      |
| LF100CMT     | NA         | LF-50K    | NA             | LF250-H | TS500  | NA      |
| LJR20C       | LJR-20H    | LF-50K    | LF-50B         | NA      | TS500  | LJR-T01 |

## INCANDESCENT AND FLUORESCENT HANDLES

|                             |       |  |  |
|-----------------------------|-------|--|--|
| 2 CONDUCTOR                 | H2-5  |  |  |
| 3 CONDUCTOR                 | H3B-5 |  |  |
| 3 CONDUCTOR BREAKER         | H5B-5 |  |  |
| HEAVY DUTY 3 CONDUCTOR      | H6B-5 |  |  |
| AUTOMATIC HANDLE            | H4B-5 |  |  |
| SOCKET, PUSH THROUGH SWITCH | S-1   |  |  |
| 15W FLUORESCENT HANDLE      | 15F8  |  |  |

## MISC

| MODEL NUMBER | MAGNIFIER LENS | CLAMP KIT | BASE | TRANSFORMER | MAGNET |
|--------------|----------------|-----------|------|-------------|--------|
| FTL130       | M-1            | CM-1      | BF-1 | T-5         | M-2    |
| FTL230       | NA             | CM-1      | BF-1 | T-5         | M-2    |

## REEL PARTS AND MOUNTING HARDWARE

| MODEL NUMBER   | MOUNTING HARDWARE | MOUNTING BRACKET      | REELBAND |
|----------------|-------------------|-----------------------|----------|
| 900 REEL       | WB-1              | NA                    | NA       |
| 3000 REEL      | WB-2              | NA                    | NA       |
| 5000 REEL      | WB-2              | NA                    | RB-1     |
| 8000 REEL      | NA                | MBR-3                 | NA       |
| 8100 REEL      | NA                | WB-5                  | NA       |
| 8600 REEL      | NA                | WB-4                  | NA       |
| 7000WR         | NA                | MBR-2                 | NA       |
| 5200/5300 REEL | NA                | BFL-100 Fixed L       | NA       |
| 5200/5300 REEL | NA                | BWS-200 Wall Swivel   | NA       |
| 5200/5300 REEL | NA                | BTS-300 Triangle Side | NA       |

# Glossary of Wire and Terminology

## Abbreviations

**S** = Service

**J** = Junior

**O** = Oil Resistant

**T** = Thermoplastic/Vinyl

**W** = Weather Resistant

**P** = Parallel

**SJT** Junior hard service thermoplastic insulated conductors with overall thermoplastic jacket.

**SJTOW** Hard service cord. Thermoplastic constructed jacket. Oil and weather resistant for outdoor use.

**SJTW** Hard service cord. Thermoplastic constructed jacket. 300 volt, weather resistant for outdoor use.

**SPT-1** Thermoplastic constructed cord, parallel jacketed, 300 volt. 2 or 3 conductor, 18 gauge.

**SPT-2** Same as SPY-1 except heavier construction. 18-16 gauge.

**STW** Hard service, indoor/outdoor water resistant outer jacket.

**SVT** Vacuum cleaner service cord. All plastic construction, 2 or 3 conductor.

**AWG** American Wire Gauge. A relative system for the designation of diameter.

**Alternating Current (AC)** or line voltage - U.S. household standard current is 110/120 volts, 60 cycle.

**AMP Load** Total amount of amperage flowing through a conductor (wire) when it is loaded.

**Circuit** The path that electricity flows through a conductor.

**Compound** Insulation or jacketing material of two or more ingredients.

**Conductor** Material (wire) that is capable of transporting and electrical charge easily. Cords can be two or three conductor.

**Cord** An insulated wire (conductor) for conveying current.

**CRI** Unit of measurement indicating Color Rendering Index. Higher units provide more true color to objects in comparison to appearance in natural sunlight.

**CSA** Canadian Standards Association, a non-profit, independent organization that operates a listing service for electrical and electronic materials and equipment. The Canadian counterpart of the Underwriters Laboratories.

**Current** The flow of electricity through a conductor measured in amperes.

**Direct Current (DC)** An electrical current that flows in one direction. Batteries are an example of DC current production.

**ETL** An independent, non-profit organization that operates a listing service for electrical/electronic materials /equipment and uses UL standards.

**Gauge** Term used to denote physical size of wire.

**Ground** Electrical term referring to connecting to the earth or large conducting body to serve as earth.

**Insulation** Non-conductive material that surrounds or separates two conductive materials (wire).

**KELVIN** Unit of measurement indicating Color Temperature. Below 2700K is Warm White, 4500K is Cool White and 7000K is Daylight.

**LED** Light emitting diode

- **5 MM** Round dome shaped lens emits light with a 10° - 20° beam out.

- **SMD** Surface Mounted Diode emitting brighter, wide beam pattern.

- **COB** Chips On Board has a series of diode chips mounted directly onto a circuit board. Wide beam pattern especially useful in compact mounting spaces.

**LUMEN** Unit of measurement for LED Light Output. Higher lumens = brighter light.

**NEMA** National Electric Manufacturers.

**OSHA** Occupational Safety and Health Act. Specifically the Williams-Steiger law passed in 1970 covering all factors relating to safety in places of employment.

**Polarity** Condition by which the direction of current flow can be determined in an electrical circuit.

**Polarized Plug** A plug constructed to allow insertion into a receptacle only one way because one blade is wider than the other.

**PVC** Polyvinyl Chloride. Compound used in thermoplastic cords.

**Rated Voltage** Maximum voltage at which an electrical component can be operated for extended periods without causing a safety hazard or undue degradation.

**Resistance** A substance that impedes the flow of current resulting in loss of power, such as heat.

**Sheath** Outer jacket or covering of multi-conductor cable.

**Thermoplastic** Plastic material that softens when heated and firms when cooled. Examples are Polyvinyl Chloride and Polyethylene.

**UL** Underwriters Laboratories, an independent, non-profit organization that operates a listing service for electrical/ electronic materials / equipment.

**Volt** Unit to measure electromotive force.

**Watt** Unit of electrical power defined as one amp of current driven by one volt of electromotive force.

All Alert products are individually tested and inspected for defects in material and workmanship before leaving the factory. Should your Alert product fail within the warranty period due to faulty workmanship or material, simply return it to the original place of purchase for a replacement.

limited to the replacement of the original purchase. No other liability, responsibility or warranty is expressed or implied including any



WHERE INNOVATION COMES TO LIGHT®

24500 Solon Road  
Bedford Heights, OH 44146  
440 | 232 | 5020  
[www.alertstamping.com](http://www.alertstamping.com)

# 2020 PRODUCT CATALOG

